



## Information technology — MPEG audio technologies —

### Part 1: MPEG Surround

#### TECHNICAL CORRIGENDUM 4

*Technologies de l'information — Technologies audio MPEG —*

*Partie 1: Ambiance MPEG*

*RECTIFICATIF TECHNIQUE 4*

Technical Corrigendum 4 to ISO/IEC 23003-1:2007 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

---

*In 3.3.1, replace:*

$y = \log_{10}(x)$  is the base-2 logarithm of  $x$ .

*with:*

$y = \log_{10}(x)$  is the base-10 logarithm of  $x$ .

In 4.6, replace:

The surround gain is applied to each surround channel (i.e., left surround and right surround for a 5.1 configuration) in the PCM domain after QMF synthesis.

with:

The surround gain is applied to each surround channel in the PCM domain after QMF synthesis (i.e. left surround and right surround for a 5.1 configuration with the addition of rear left surround and rear right surround for a  $727_2$  or  $757_2$  configuration).

At the end of 4.6, add:

The application of pre- and post-gains is dependent on the output configuration according to the following table. In the case of binaural output, the surround gain is explicitly included in the formulas for power reconstruction (see 6.11.4)

**Table X - Application of pre- and post-gains**

	Stereo output	Binaural output	Multichannel output
<b>Surround gain</b>	no	yes	yes
<b>LFE gain</b>	no	no	yes
<b>Downmix gain</b>	no	no	yes


In 6.4.3.2.1 replace:

$$\mathbf{v}^{n,k} = \mathbf{M}_1^{n,k} \mathbf{x}^{n,k} = \mathbf{M}_1^{n,k} \begin{bmatrix} x_{L_0}^{n,k} \\ x_{R_0}^{n,k} \\ x_{res_0}^{n,k} \\ x_{res_1}^{n,k} \\ x_{res_2}^{n,k} \end{bmatrix} = \begin{bmatrix} V_L^{n,k} \\ V_R^{n,k} \\ V_C^{n,k} \\ V_{OTT_2}^{n,k} \\ V_{OTT_1}^{n,k} \\ V_{TTI_0}^{n,k} \end{bmatrix}$$


with:

$$\mathbf{v}^{n,k} = \mathbf{M}_1^{n,k} \mathbf{x}^{n,k} = \mathbf{M}_1^{n,k} \begin{bmatrix} x_{L_0}^{n,k} \\ x_{R_0}^{n,k} \\ x_{res_0}^{n,k} \\ x_{res_1}^{n,k} \\ x_{res_2}^{n,k} \end{bmatrix} = \begin{bmatrix} V_L^{n,k} \\ V_R^{n,k} \\ V_C^{n,k} \\ V_{OTT_1}^{n,k} \\ V_{OTT_2}^{n,k} \\ V_{TTI_0}^{n,k} \end{bmatrix}$$

In 6.4.4.1, replace Figure 27:

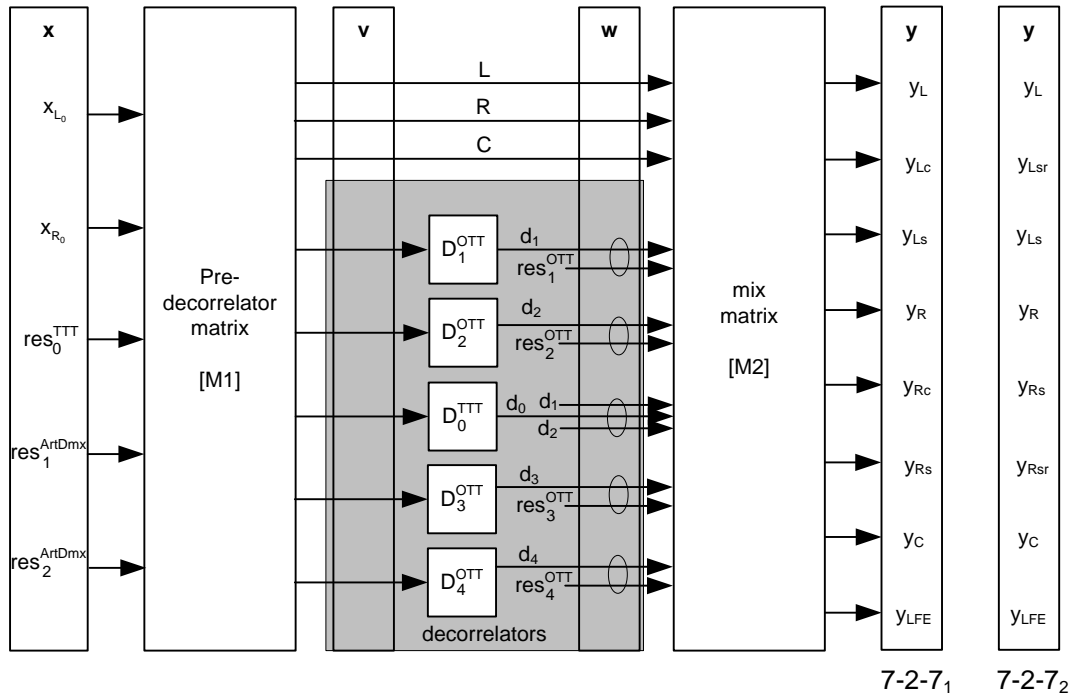

with:

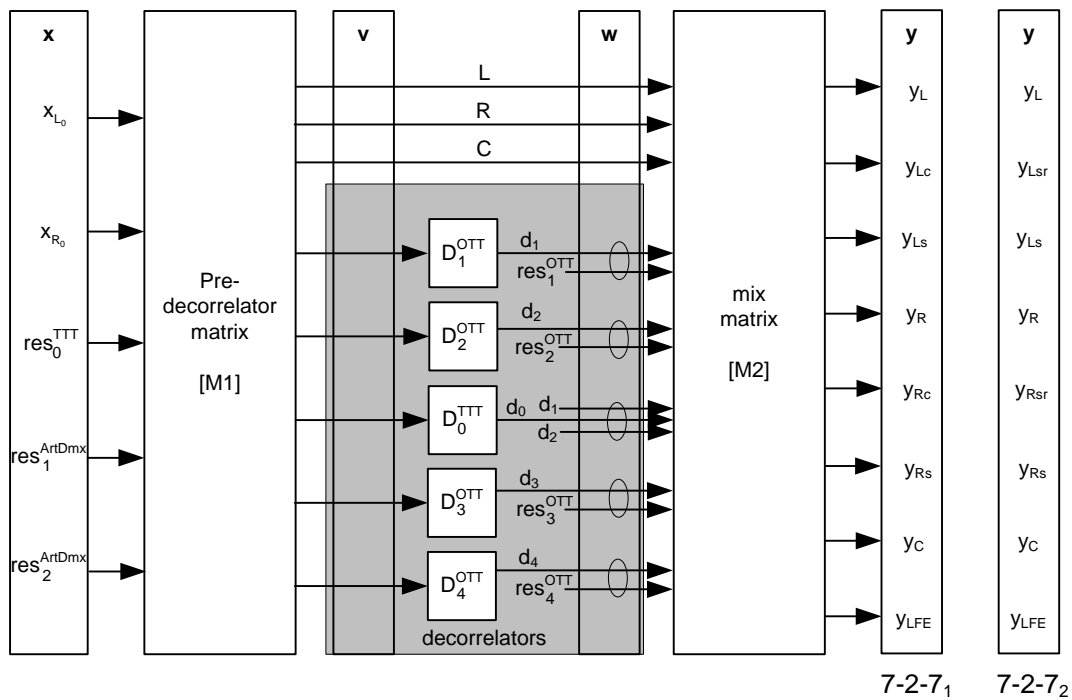

In 6.4.4.1 replace (2 times):

Figure 26

with: