


RATIONALE

SPECIFICATION DEVELOPED FOR APPLICATIONS REQUIRING HIGHER CONDUCTOR TENSILE STRENGTH WHILE MAINTAINING ELECTRICAL CONDUCTIVITY. THIS SPECIFICATION USES THE EXTRA HIGH STRENGTH CLASSIFICATION OF SILVER PLATED COPPER ALLOY CONDUCTOR FROM AS29606.

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS22759.

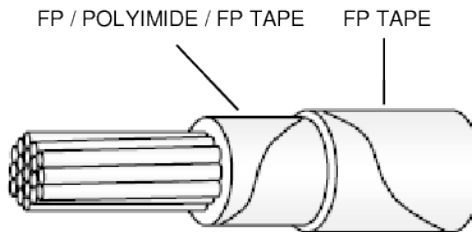

FP – FLUOROCARBON POLYMER MODIFIED POLYTETRAFLUOROETHYLENE (PTFE)
CONDUCTOR – STRANDED SILVER COATED EXTRA HIGH STRENGTH COPPER ALLOY


FIGURE 1 - AS22759/195 CONFIGURATION

TABLE 1 - CONSTRUCTION DETAILS FOR FINISHED WIRE

PART NO. 1/	WIRE SIZE	STRANDING (NUMBER OF STRANDS X SIZE GAUGE OF STRANDS)	CONDUCTOR 3/			FINISHED WIRE				
			DIAMETER (IN)		RESISTANCE AT 20 °C (68 °F) (OHMS/1000 FEET MAX)	DIAMETER (IN)		WEIGHT (LB/1000 FEET) 2/		
			MIN	MAX		MIN	MAX	MIN	TARGET	MAX
M22759/195-30-*	30	7 X 38	0.0117	0.0124	117.4	0.026	0.029	0.75	0.83	0.91
M22759/195-28-*	28	7 X 36	0.0147	0.0154	74.4	0.029	0.033	0.97	1.05	1.12
M22759/195-26-*	26	19 X 38	0.0184	0.0204	44.8	0.033	0.037	1.34	1.47	1.60
M22759/195-24-*	24	19 X 36	0.0231	0.0244	28.4	0.038	0.042	1.87	2.04	2.20
M22759/195-22-*	22	19 X 34	0.0293	0.0314	17.5	0.043	0.047	2.70	2.90	3.10
M22759/195-20-*	20	19 X 32	0.0373	0.0395	10.7	0.051	0.055	4.25	4.45	4.65

- 1/ PART NUMBER: THE ASTERISKS IN THE PART NUMBER COLUMN OF TABLE 1 SHALL BE REPLACED BY COLOR CODE DESIGNATORS IN ACCORDANCE WITH MIL-STD-681. EXAMPLES: M22759/195-20-93 IS A 20 AWG WHITE WITH ORANGE STRIPE.
- 2/ THE ACCEPTABLE VALUE FOR THE CPK FOR THE FINISHED WIRE WEIGHT LISTED SHALL BE 1.3, USING A NORMAL (GAUSSIAN) DISTRIBUTION TO OBTAIN THOSE CPK VALUES.
- 3/ CONDUCTOR SHALL CONFORM TO AS29606 TYPE SCS SMALL DIAMETER SILVER COATED EXTRA HIGH STRENGTH COPPER ALLOY CONDUCTOR.

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS22759/195>

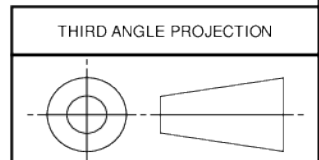

ISSUED 2016-07

CUSTODIAN: AE-8/AE-8D

PROCUREMENT SPECIFICATION: AS22759



AEROSPACE STANDARD

WIRE, ELECTRICAL, POLYTETRAFLUOROETHYLENE/POLYIMIDE INSULATED, SMOOTH SURFACE, NORMAL WEIGHT, SILVER COATED, EXTRA HIGH STRENGTH COPPER ALLOY, 200 °C, 600 VOLTS ROHS

AS22759™/195
SHEET 1 OF 4

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, stabilized or cancelled. SAE invites your written comments and suggestions.

REQUIREMENT: ALL REQUIREMENTS SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS22759.

1. WIRE CONSTRUCTION:

WIRE CONSTRUCTION SHALL BE IN ACCORDANCE WITH FIGURE 1 AND TABLES 1, 2, 3, AND 4.

TABLE 2 - WIRE INSULATION MATERIALS

TAPE CODE	THICKNESS (NOM)	MATERIAL
1	0.0020	0.0005 (FP)/0.0010 (POLYIMIDE)/0.0005 (FP)
2	0.0020	FP (UNSINTERED)

TABLE 3 - TAPE OVERLAP REQUIREMENTS ^{1/}

WIRE SIZE	WRAP 1				WRAP 2			NOMINAL WALL THICKNESS (MILS)
	TAPE CODE	PERCENT OVERLAP		TAPE CODE	PERCENT OVERLAP			
		MIN	MAX		MIN	MAX		
30	1	50.5	54.0	2	50.5	54.0	7.4	
28	1	50.5	54.0	2	50.5	54.0	7.4	
26	1	50.5	54.0	2	50.5	54.0	7.4	
24	1	50.5	54.0	2	50.5	54.0	7.4	
22	1	50.5	54.0	2	50.5	54.0	7.4	
20	1	50.5	54.0	2	50.5	54.0	7.4	

^{1/} WRAP 1 IS INNERMOST TAPE WHICH IS IN CONTACT WITH THE CONDUCTOR.

2. WIRE PERFORMANCE RATING:

TEMPERATURE RATING: 200 °C (392 °F) MAXIMUM CONDUCTOR CONTINUOUS TEMPERATURE.

VOLTAGE RATING: 600 VOLTS (RMS) AT SEA LEVEL. THIS INSULATION SYSTEM HAS BEEN USED IN AEROSPACE APPLICATIONS USING 115 VOLTS (PHASE TO NEUTRAL), 400 HERTZ AC AND 28 VOLTS DC. VERIFICATION OF THE SUITABILITY OF THIS PRODUCT FOR USE IN OTHER ELECTRICAL SYSTEM CONFIGURATIONS IS THE RESPONSIBILITY OF THE USER.

3. MATERIALS AND PHYSICAL PROPERTIES:

SEE AS22759 FOR MATERIAL REQUIREMENT. MATERIALS USED IN THE MANUFACTURE OF THESE PRODUCTS SHALL COMPLY WITH THE RESTRICTION OF HAZARDOUS SUBSTANCES DIRECTIVE 2002/95/EC.

4. FINISH WIRE INSULATION PROPERTIES:

FINISH WIRE INSULATION PROPERTIES SHALL BE IN ACCORDANCE WITH TABLE 4.

TABLE 4 - FINISHED WIRE INSULATION PROPERTIES REQUIREMENTS

INSULATION PROPERTIES	
IMPULSE TEST VOLTAGE	8.0 KILOVOLTS (PEAK)
HIGH FREQUENCY TEST VOLTAGE	5.7 KILOVOLTS (RMS)
INSULATION STATE OF SINTER	3.0 JOULES PER GRAM MAXIMUM
TAPE OVERLAP	TABLE 3
LAMINATION SEALING	260 °C ± 2 °C (500 °F ± 3.6 °F), 6 HOURS
INSULATION BLOCKING	200 °C ± 2 °C (392 °F ± 3.6 °F)
SHRINKAGE	230 °C ± 2 °C (446 °F ± 3.6 °F) MAXIMUM CHANGE .091 INCHES
ELECTRICAL RESISTANCE (IR)	5000 MEGOHMS (MIN)-1000 FEET
WET DIELECTRIC VOLTAGE	2500 VOLTS (RMS), 60 HERTZ
INSULATION STRIP FORCE	.25 - 6.0 POUNDS: WIRE SIZES 26 - 20 NOT REQUIRED FOR WIRE SIZES 30 - 28
UV LASER MARKING	62% MINIMUM AVERAGE
CONTINUOUS LENGTH SCHEDULE	B