



Designation: D2619 – 21

Standard Test Method for Hydrolytic Stability of Hydraulic Fluids (Beverage Bottle Method)¹

This standard is issued under the fixed designation D2619; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope*

1.1 This test method² covers the determination of the hydrolytic stability of petroleum or synthetic-based hydraulic fluids.

NOTE 1—Water-based or water-emulsion fluids can be evaluated by this test method, but they are run “as is.” Additional water is not added to the 100 g sample. In these cases, the person requesting the test needs to let the test operator know that water is present.

1.2 The values stated in SI units are to be regarded as the standard. The English units given in parentheses are provided for information only.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.* Specific warning statements are given in 3.1, 6.1, 6.3, 6.9 and Annex A1.

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*³

[D130 Test Method for Corrosiveness to Copper from Petroleum Products by Copper Strip Test](#)

[D664 Test Method for Acid Number of Petroleum Products by Potentiometric Titration](#)

¹ This test method is under the jurisdiction of ASTM Committee D02 on Petroleum Products, Liquid Fuels, and Lubricants and is the direct responsibility of Subcommittee D02.N0 on Hydraulic Fluids.

Current edition approved May 1, 2021. Published June 2021. Originally approved in 1967. Last previous edition approved in 2014 as D2619 – 09 (2014). DOI: 10.1520/D2619-21.

² This test method is a modification of Federal Test Method Standard No. 791a, Method 3457 for Hydrolytic Stability.

³ For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard’s Document Summary page on the ASTM website.

[D974 Test Method for Acid and Base Number by Color-Indicator Titration](#)

3. Summary of Test Method

3.1 A copper test specimen and 75 g of test fluid plus 25 g of water (or 100 g of a water-containing fluid) are sealed in a pressure-type beverage bottle. The bottle is rotated, end for end, for 48 h in an oven at 93 °C (200 °F). Layers are separated and the weight change of the copper specimen is measured. The acid number change of the fluid and acidity of the water layer are determined. (**Warning**—In addition to other precautions, because this test method involves the use of a glass bottle that may contain approximately 200 kPa (2 atm) of air and water vapor at temperatures up to 93 °C, a full face shield and heavy woven fabric gloves should be worn when handling or working with the heated and sealed sample container.)

4. Significance and Use

4.1 This test method differentiates the relative stability of hydraulic fluids in the presence of water under the conditions of the test. Hydrolytically unstable hydraulic fluids form acidic and insoluble contaminants which can cause hydraulic system malfunctions due to corrosion, valve sticking, or change in viscosity of the fluid. The degree of correlation between this test method and service performance has not been fully determined.

5. Apparatus

5.1 *Air Oven*, convection, adjusted to 93 °C \pm 0.5 °C (200 °F \pm 1 °F).

5.2 *Pressure-Type Beverage Bottles*,⁴ 200 mL (7 oz), as shown in Fig. 1. It is not essential that bottles conform exactly to the dimensions shown as long as they fit securely in the holders and caps do not leak. Bottles with straight sides and a narrower neck are also marketed for this application but there are some reports of breakage during use as the copper coupon will move with greater velocity during the rotation. The curved sides help to slow the movement of the coupon.

⁴ Bottles can be obtained from suppliers of the test apparatus or from beverage distributors.

*A Summary of Changes section appears at the end of this standard

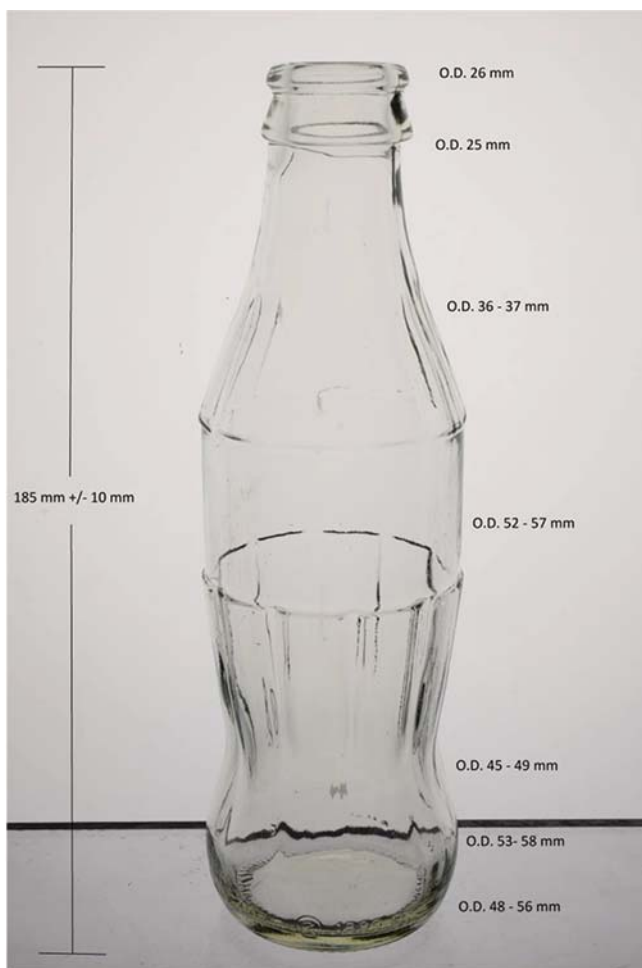


FIG. 1 Beverage Bottle

5.3 Capping Press, for bottles.

5.4 Rotating Mechanism, for holding bottles and rotating end over end at 5 r/min in oven.

5.5 Filtration Assembly and Filter Flask.

5.6 Vacuum source, for filtration.

5.7 Separatory Funnel, 125 mL.

5.8 Balance, sensitive to 0.2 mg.

5.9 Caps, for sealing bottles.

5.10 Inert Seal, for cap gasket, 0.127 mm (0.005 in.) thick fluorocarbon seal.

6. Reagents and Materials

6.1 *n*-Heptane. (**Warning**—Flammable, harmful if inhaled, skin irritant on repeated contact, aspiration hazard; see A1.1.)

6.2 Phenolphthalein, 1 % alcoholic solution.

6.3 Potassium Hydroxide (KOH), 0.1 N aqueous solution standardized to within 0.0005 N. (**Warning**—Caustic.)

6.4 Copper Strip (QQ-C-576A), 16-22 B and S gage, 13 mm by 51 mm.

6.5 Steel Wool, medium fine.

6.6 pH Paper.

6.7 Filter Paper, Whatman No. 41.

6.8 Anhydrous Sodium Sulfate (Na₂SO₄).

6.9 1,1,1-Trichloroethane (optional—for use when the test fluid is a phosphate ester). (**Warning**—Harmful if inhaled, high concentrations may cause unconsciousness or death; contact may cause skin irritations and dermatitis, may produce toxic vapors if burned, eye irritant; see A1.2.)

7. Procedure

7.1 Fill the pressure beverage bottle with distilled water and allow to stand overnight. Drain and rinse with fresh distilled water, but do not dry.

7.2 Determine the total acid number of the test fluid in accordance with Test Method D664 or D974.

7.3 Weigh 75 g of test fluid and 25 g of distilled water (or in the case of water-containing fluids, 100 g of the test fluid) to 0.5 g into the beverage bottle.

7.4 Polish the copper test specimen (including the edges) to a clean surface with the steel wool and wash with *n*-heptane. (**Warning**—see 6.1.) Dry and weigh to 0.2 mg. Immediately immerse the copper specimen in the fluid in the beverage bottle. Avoid specimen contact by handling the cleaned copper test strip with cotton gloves or filter paper.

7.5 Prepare a disk of the inert seal and place in a new bottle cap. Seal the bottle using the cap with the gasket. Invert the bottle for 5 min to check for leakage. If it leaks, start over in 7.3 with a fresh sample.

7.6 Place the bottle in the rotating mechanism in the oven adjusted to 93 °C ± 0.5 °C (200 °F ± 1 °F). Allow to rotate, end for end, at 5 r/min for 48 h.

7.7 Remove the bottle from the oven and place on an insulated surface, allowing it to cool for approximately 1 h.

7.8 Open the bottle and decant the contents (except for the copper specimen) into a 125 mL separatory funnel. Allow the layers to separate and remove the aqueous layer to a beaker (Note 2).

NOTE 2—For water-containing fluids, there will be no separation, and so this step should be bypassed. Certain other fluids may emulsify with water and not separate during this step. In either of these cases, no determination of water acidity will be conducted and a remark should be inserted into the test report to this effect. If the fluid sample is heavier than water, drain the fluid from the separatory funnel, remove the water wash, and return the fluid to the separatory funnel for repeated water washes.

7.9 Wash the oil layer with 25 mL portions of distilled water (inverting the separatory funnel several times to allow for sufficient washing), repeating until the washings have the same pH as the distilled water, but perform no more than five washes (for most samples, three are adequate). Add these water washes to the beaker from 7.8 and set aside for the water acidity determination in 7.12. Dry the washed fluid with anhydrous sodium sulfate or by vacuum dehydration (Note 3), or both.

NOTE 3—Mechanical stirring for 1 h with the anhydrous sodium sulfate dries the fluid efficiently. Add sufficient sodium sulfate with swirling until it no longer forms clumps in the fluid.