

Issued 1973-07
Reaffirmed 1998-10

Superseding J1028 AUG89

Submitted for recognition as an American National Standard

Mobile Crane Working Area Definitions

Foreword—This reaffirmed document has been changed only to reflect the new SAE Technical Standards Board format. Purpose was changed to 1.1 and References were added as Section 2.

1. **Scope**—This SAE Recommended Practice applies to stationary usage of mobile construction-type cranes, crawler or rubber-tire mounted, on outriggers or on tires, when used for lifting crane, clamshell, dragline, magnet, pile driver, or similar service.
- 1.1 **Purpose**—The purpose of this document is to establish uniform definitions of the areas around mobile construction-type cranes in which the crane loads are handled.
2. **References**—There are no referenced publications specified herein.
3. **Definitions**
 - 3.1 **Rubber-Tire Mounted**—Carrier on outriggers, front outrigger behind front wheels. See Figure 1.
 - 3.2 **Rubber-Tire Mounted**—Carrier on outriggers, front outrigger ahead of front wheels. See Figure 2.
 - 3.3 **Rubber-Tire Mounted**—Carrier on tires. See Figure 3.
 - 3.4 **Crawler Mounted**—See Figure 4.
4. **Discussion**
 - 4.1 Diagrams depicting the appropriate definitions(s) should be supplied by the manufacturer and be located for ready reference by the user.
 - 4.2 These definitions are based upon the usual, full-revolving mobile crane configurations. Configurations which deviate sufficiently to make it impractical to use these definitions shall have their working areas defined by appropriate sets of diagrams supplied by the manufacturer and located for ready reference by the user.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

QUESTIONS REGARDING THIS DOCUMENT: (724) 772-8512 FAX: (724) 776-0243
TO PLACE A DOCUMENT ORDER; (724) 776-4970 FAX: (724) 776-0790
SAE WEB ADDRESS <http://www.sae.org>

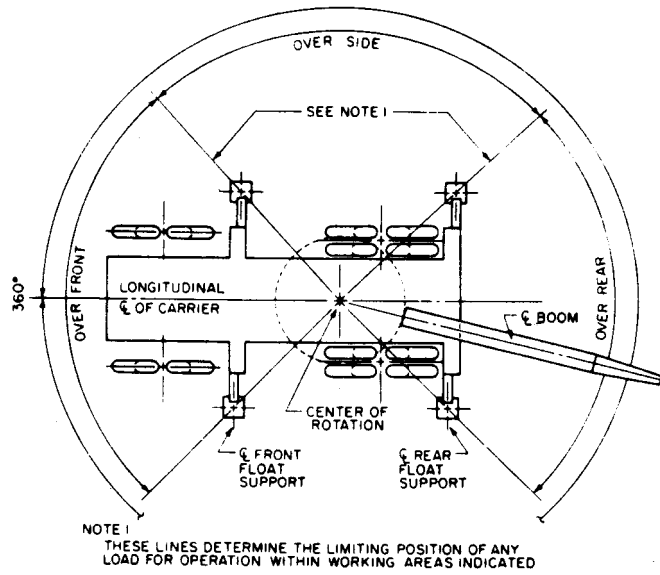


FIGURE 1—CARRIER ON OUTRIGGERS, FRONT OUTRIGGER BEHIND FRONT WHEELS

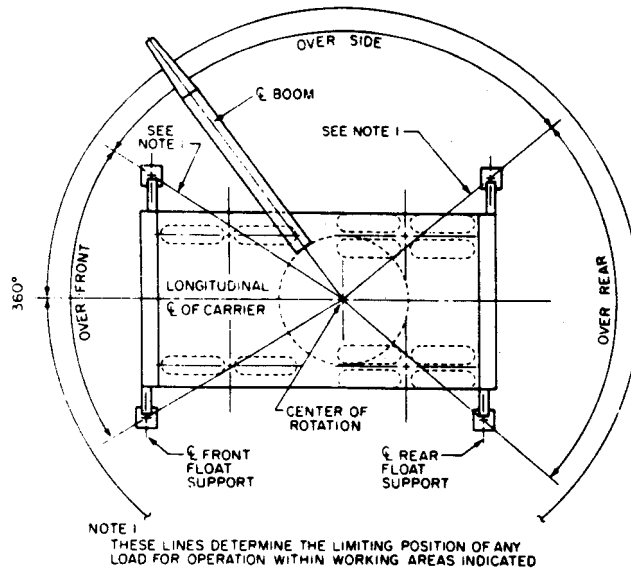


FIGURE 2—CARRIER ON OUTRIGGERS, FRONT OUTRIGGER AHEAD OF FRONT WHEELS