

Submitted for recognition as an American National Standard

## AIRFLOW REFERENCE STANDARDS

**Foreword**—This reaffirmed document has been changed only to reflect the new SAE Technical Standards Board format.

1. **Scope**—The purpose of this SAE Recommended Practice is to establish reference standards for airflow measurements in the ranges required for testing automotive engine induction systems and to describe equipment that will facilitate the use of such standards to check the accuracy of various equipment and methods.
  2. **References**—There are no referenced publications specified herein.
  3. **Airflow Nozzle Definition**—The airflow reference system consists of a series of 10 nozzles called Calibration Transfer Nozzles, which are designed for operation at sonic flow velocities. Each nozzle is identified by a particular serial number and its nominal airflow, expressed in grams per second, at standard flow conditions. For this document, standard conditions are defined as:
    - a. Air Pressure—100 kPa ABS
    - b. Exit Pressure—less than 45 kPa ABS
    - c. Air Temperature—25 °C
    - d. Ambient Relative Humidity—35%
- 3.1 The nominal flow values established for the series of nozzles that should be used are: 1, 5, 10, 15, 20, 25, 50, 100, 150, and 200 g/s.

Typical outline dimensions and nozzle shape of an approved calibration transfer nozzle are shown in Figure 1. Nozzles produced for use in accordance with this document must be calibrated by a procedure which establishes an overall uncertainty (possible bias plus three standard errors) with 0.2% of a primary standard traceable to the National Institute of Standards and Technology (NIST).

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

QUESTIONS REGARDING THIS DOCUMENT: (412) 772-8512 FAX: (412) 776-0243  
TO PLACE A DOCUMENT ORDER; (412) 776-4970 FAX: (412) 776-0790  
SAE WEB ADDRESS <http://www.sae.org>

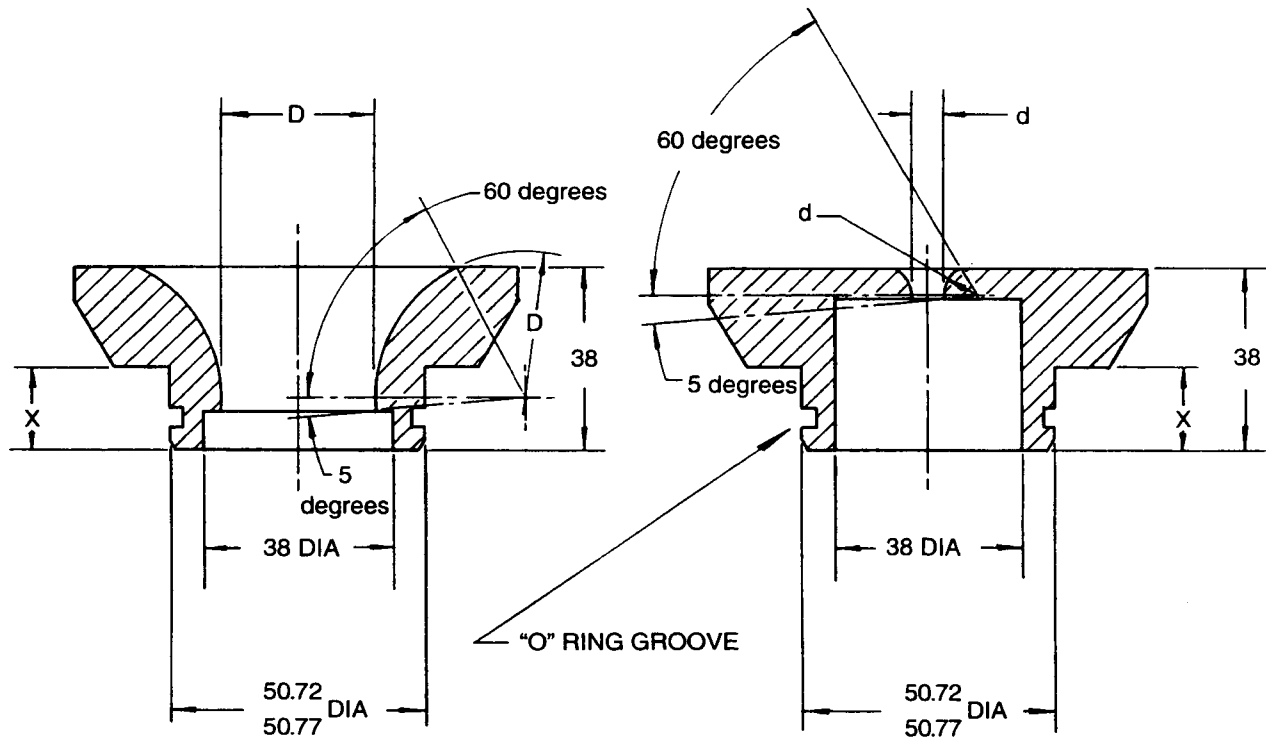


FIGURE 1—TYPICAL OUTLINES OF AIRFLOW CALIBRATION TRANSFER NOZZLE

4. **Accessory Hardware and Instrumentation**—Figure 2 shows the nozzle holder which provides the adaptation necessary to fit the user's test equipment. The construction details of the holder are optional, but the dimensions of the air section must be retained. During use, there shall be no obstruction upstream of the nozzle inlet face for a distance of  $5 D_{max}$  in a direction parallel to the flow and for a distance of  $3 D_{max}$  in a direction perpendicular to the flow, where  $D_{max}$  is the throat diameter of the largest nozzle. Although the kind of temperature and pressure measuring instruments are not specified in this document, their accuracy must be traceable to the NIST and the overall uncertainty of their readings must be within 0.1% of actual. These instruments should be placed upstream of the nozzle entrance, preferably at a distance equal to the obstruction limits (see Figure 3). When calibration transfer nozzles are used for correlation between flow locations, a single set of temperature and pressure measuring instruments shall be used.