



# Standard Guide for Installing and Operating Settlement Platforms for Monitoring Vertical Deformations<sup>1</sup>

This standard is issued under the fixed designation D6598; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

## 1. Scope\*

1.1 This guide provides recommended designs and procedures for the fabrication, installation, operation, and reading of settlement platform to determine the magnitude and rate of foundation, fill settlements, or both generally under a fill or embankment load. Two types of settlement platforms are described – those being monitored by elevation surveys from an external bench mark and those that include an internal reference system supported on unyielding soil or rock beneath the compressible layer(s) of interest.

1.2 *Units*—The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

1.3 *This guide does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this guide to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

1.4 *This guide offers an organized collection of information or a series of options and does not recommend a specific course of action. This document cannot replace education or experience and should be used in conjunction with professional judgement. Not all aspects of this guide may be applicable in all circumstances. This ASTM standard is not intended to represent or replace the standard of care by which the adequacy of a given professional service must be judged, nor should this document be applied without consideration of a project's many unique aspects. The word "standard" in the title of this document means only that the document has been approved through the ASTM consensus process.*

## 2. Referenced Documents

### 2.1 ASTM Standards:<sup>2</sup>

<sup>1</sup> This guide is under the jurisdiction of ASTM Committee D18 on Soil and Rock and is the direct responsibility of Subcommittee D18.23 on Field Instrumentation. Current edition approved Nov. 1, 2011. Published January 2012. Originally approved in 2000. Last previous edition approved in 2007 as D6598-07. DOI: 10.1520/D6598-11.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

[D653 Terminology Relating to Soil, Rock, and Contained Fluids](#)

[D3740 Practice for Minimum Requirements for Agencies Engaged in Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction](#)

[D5092 Practice for Design and Installation of Groundwater Monitoring Wells](#)

## 3. Terminology

### 3.1 Definitions:

3.1.1 For definitions of terms in this standard, refer to Terminology [D653](#).

### 3.2 Definitions of Terms Specific to This Standard:

3.2.1 *settlement platform*—a system consisting of a square base platform with an extendible riser pipe of known length which is used to monitor vertical deformations at the elevation of the base platform by survey measurements made of the top of the riser pipe.

3.2.2 *external and internal reference point system*—with an external system, the amount of settlement is determined by referencing the elevation of the settlement platform to an outside elevation benchmark; with an internal system, the amount of settlement is determined by measuring the relative displacement of two co-axial riser pipes moving relative to each other, the outer riser pipe being attached to the base platform and the inner riser pipe being fixed to an unyielding stratum.

3.2.3 *anchor*—an anchor system that provides an internal fixed reference point below the base of the settlement platform system.

3.2.4 *extendible riser*—a metal shaft or pipe which can be incrementally lengthened using sections of the same material and appropriate couplings as fill is placed and compacted to ensure that the top of the riser remains above the level of the surrounding ground surface. Depending on whether an external or internal reference point is being used, there may be one or two risers.

3.2.5 *isolation casing*—a casing of a larger diameter than the extendible risers is used in some installations to prevent down-drag of soil on the extendible riser that would otherwise

\*A Summary of Changes section appears at the end of this standard

be in contact with the soil from placing additional load on the platform and thereby leading to overestimates of deformations.

3.2.6 For definitions of other terms used in this guide see Terminology **D653**.

#### 4. Summary of Standard Guide

4.1 The standard guide presents recommended designs for settlement platforms along with procedures to install, operate and monitor them. The standard guide focuses on methods that permit (i) the effect of fill placement on underlying strata and (ii) the determination of the relative deformation within a fill. The guide addresses ways in which the instrument is protected from downdrag effects from the fill soils as well as measures to protect the instrument from damage by earth moving equipment. Standard survey procedures are used to determine the magnitude of deformations. Recommended procedures for reporting the details of an installation and the recorded deformations are presented.

#### 5. Significance and Use

5.1 Earthen fills are often constructed as engineered structures, for example, dams, or to support engineered structures, for examples, roads or buildings. The weight of the fill may compress or deform the supporting soil or rock foundation resulting in settlement of the soil throughout the embankment. Temporary embankments or surcharge fills are constructed to increase the strength and/or reduce the compressibility of foundation soils prior to placement of the actual foundation or structure. The designers often monitor the settlement of the earth structure as a function of time to document the magnitude and rate of settlement, to evaluate the potential for future settlement, or to confirm the effectiveness of the surcharge and the schedule for its removal. The monitoring is performed using settlement platforms installed prior to or during the embankment construction. A platform provides an accessible survey point that settles with a selected soil horizon within or below the embankment. Careful design and installation of the settlement platform can isolate the survey point from extraneous sources of movement such as frost-induced heave, compression within the embankment, or volume changes caused by moisture gain or loss.

5.2 Various settlement platform designs have been developed by the agencies and practitioners that use them. This standard guide provides designs and procedures that can be referred to in design guidelines, specifications and reports.

5.3 This standard guide is not meant to restrict the use of other equally appropriate designs and procedures for the fabrication, installation, operation, and reading of settlement platforms to monitor deformations in earthen deposits during and after construction.

NOTE 1—Notwithstanding the statements on precision and bias contained in this guide, the precision of this guide is dependent on the competence of the personnel performing it and the suitability of the equipment and facilities used. Agencies that meet the criteria of Practice **D3740** are generally considered capable of competent and objective testing. Users of this guide are cautioned that compliance with Practice **D3740** does not itself ensure reliable testing. Reliable testing depends on many factors; Practice **D3740** provides a means of evaluating some of these factors.

## 6. Materials

6.1 A variety of materials are used in combination to provide a cost-effective, modular system. Given that the anticipated operational life of settlement platforms is typically relatively short, concerns about long term durability are generally negligible. Accordingly issues such as component weight, the ease with which the riser pipe can be extended and cost tend to dominate material selection decisions. The entire settlement platform system consists of 4 or 5 distinct components depending on the specific design. Typical alternative configurations are shown in **Figs. 1-3**. Key distinctions between these different configurations are summarized in **Table 1**. Additional considerations regarding materials for each of these components are provided below.

**TABLE 1 Suitability and Use of Various Platform Configurations**

Configuration	Fill Deformations	Foundation Deformations	External Reference	Internal Reference
<b>Fig. 1</b>	No <sup>A</sup>	Yes	Yes	No
<b>Fig. 2</b>	No <sup>A</sup>	Yes	No <sup>B</sup>	Yes
<b>Fig. 3</b>	No <sup>A</sup>	Yes	No <sup>B</sup>	Yes

<sup>A</sup> Fill settlements could be determined with this configuration if base platform placed at higher elevation.

<sup>B</sup> External reference (control) could be used with these configurations also.

6.2 *Base Platform*—a square base platform typically ranging between 0.3 to 1.0 m on side is placed at the elevation for which the vertical deformation is required. In some cases, a steel platform 5 to 15 mm thick is used. Alternatively, a platform 25 to 50 mm thick fabricated from plywood is sometimes used. This may be particularly desirable in short term applications where degradation of the wood is not a concern. Other materials such as concrete can be used for the base platform. In all cases, the thickness of the base platform should be selected giving consideration to the area of the platform to ensure that its rigidity is sufficient to avoid local bending.

6.3 *Riser Pipe*—a rigid metal shaft or an assembly of a rigid metal shaft and a rigid metal pipe, typically 25 to 50 mm in diameter, is used to reflect the vertical deformation of the platform at the ground surface. As layers of fill are placed, the riser pipes are extended by adding additional sections of pipe. Threaded couplings are typically used. These have the advantage that after the survey program is complete, some, if not all the riser pipe can be recovered before the installation is grouted to seal off any unwanted access for water to the subsurface. Use of PVC or other lightweight pipe materials is not recommended for reasons of survivability.

6.4 *Riser Pipe Isolation Casing*—an external pipe is sometimes used to isolate the riser pipe from the surrounding soil. This is done to prevent the effects of extraneous sources of movement such as frost-induced heave, skin-friction due to compression within the fill itself, or moisture induced volume changes. Given that this casing is only to isolate the riser pipe from these surrounding effects and does not constitute part of the deformation measuring system, PVC or other lightweight pipe materials are typically recommended. As with the riser pipe, the isolation casing can be extended as layers of fill are added. Isolation casing is typically only required if the fill or embankment height is greater than about 6 m or the plate is to be seated on a thin stiff layer overlying softer material where a

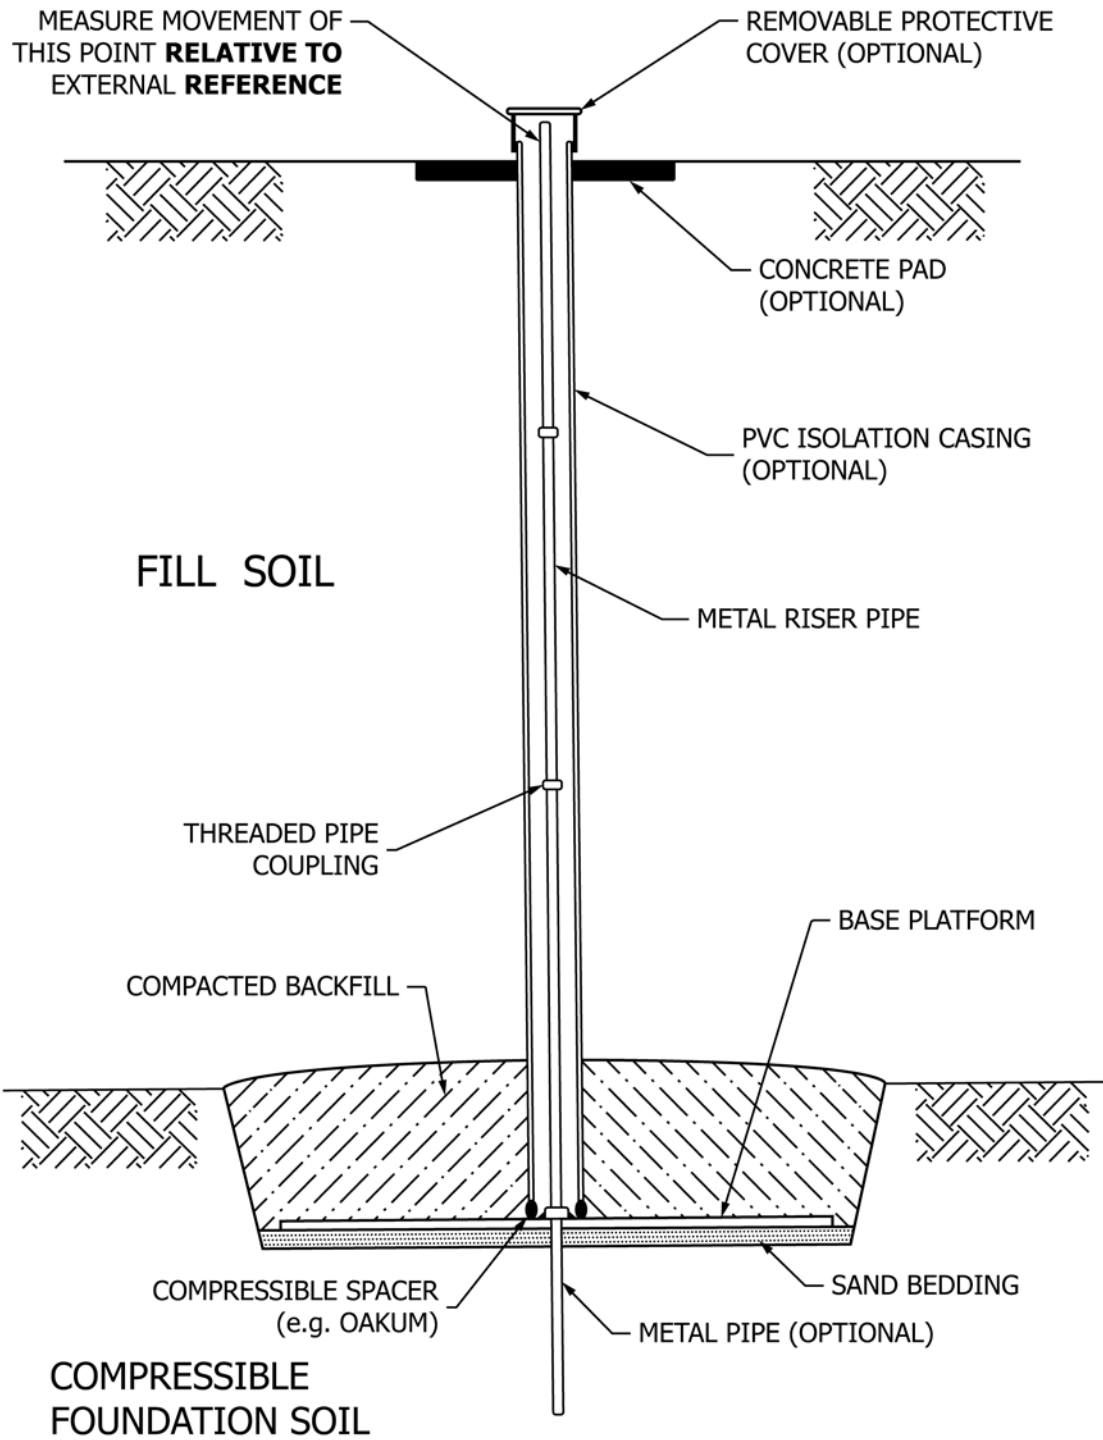


FIG. 1 Typical Installation for Externally Referenced Settlement Platform

punching failure might occur as a result of the down-drag load applied to the riser-pipe.

6.5 *Surface Protection Monument*—for settlement platforms that remain in place following completion of construction, installation of a surface protection monument to protect the riser pipe from tampering is advisable. Design of a protective casing system as described in Practice D5092 is recommended.

6.6 For installations where an internal reference or benchmark supported on unyielding soil or rock beneath the compressible layer(s) of interest is used, rigid metal pipe similar to that described in 6.3 above is recommended. Alternatively, an anchor is used in conjunction with metal pipe to ensure a fixed base reference point. A typical anchor may consist of a number of metal prongs which are driven from an initially retracted