



Standard Specification for Halon 1211, Bromochlorodifluoromethane (CF₂BrCl)¹

This standard is issued under the fixed designation D7673/D7673M; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This specification covers the requirements for Halon 1211 as a fire-fighting medium.

1.2 This specification does not address the fire-fighting equipment or hardware that employs Halon 1211 or the conditions of employing such equipment (for example, handhelds, fixed installations, etc.).

1.3 This specification does not address the storage or transportation of Halon 1211. Storage, handling, and transportation issues may be addressed in future ASTM standards.

1.4 The values stated in either SI units or inch-pound units are to be regarded separately as standard. The values stated in each system may not be exact equivalents; therefore, each system shall be used independently of the other. Combining values from the two systems may result in non-conformance with the standard.

1.5 The following safety hazards caveat pertains only to the test methods portion, Section 6, of this specification: *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.* Specific hazards statements are given in Section 4.

2. Referenced Documents

2.1 *ASTM Standards*:²

- D2108 Test Method for Color of Halogenated Organic Solvents and Their Admixtures (Platinum-Cobalt Scale)
- D7815 Practice for Handling, Transportation, and Storage of Halon 1211, Bromochlorodifluoromethane (CF₂BrCl)

¹ This specification is under the jurisdiction of ASTM Committee D26 on Halogenated Organic Solvents and Fire Extinguishing Agents, and is the direct responsibility of Subcommittee D26.09 on Fire Extinguishing Agents.

Current edition approved Jan. 1, 2015. Published February 2015. Originally approved in 2010. Last previous edition approved in 2010 as D7673/D7673M– 10^{ε2}. DOI: 10.1520/D7673_D7673M-15.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

2.2 *AHRI Standards*:³

2008 Appendix C for Analytical Procedures for AHRI Standard 700-2012

2.3 *ISO Standards*:⁴

ISO 3427 Gaseous Halogenated Hydrocarbons (Liquefied Gases) – Taking of a Sample

2.4 *U.S. Governmental Standards*:⁵

CFR Title 49, Part 172.101 Tables of Hazardous Materials and Special Provisions

CFR Title 49, Part 172 Subpart D Marking Requirements of Packaging for Transportation

3. Terminology

3.1 *Definitions of Terms Specific to This Standard*:

3.1.1 *Halon 1211*—the halogenated hydrocarbon compound Bromochlorodifluoromethane used as a fire extinguishing medium.

3.1.1.1 *Discussion*—The halon terminology system provides a convenient means to reference halogenated hydrocarbon fire extinguishants. Halogenated hydrocarbons are acyclic saturated hydrocarbons in which one or more of the hydrogen atoms have been replaced by atoms from the halogen series (that is, fluorine, chlorine, bromine, and iodine). By definition, the first digit of the halon numbering system represents the number of carbon atoms in the compound molecule; the second digit, the number of fluorine atoms; the third digit, the number of chlorine atoms; the fourth digit, the number of bromine atoms; and the fifth digit, the number of iodine atoms. Trailing zeros are not expressed. Unaccounted for valence requirements are assumed to be hydrogen atoms.

$$\text{number of hydrogen atoms} = \quad (1)$$

$$[((\text{number of carbon atoms} \times 2) + 2) - (\text{sum of halogen atoms})]$$

$$\text{For example,} \quad (2)$$

bromochlorodifluoromethane – CF₂BrCl – Halon 1211

³ Available from Air-Conditioning, Heating, and Refrigeration Institute (AHRI), 2111 Wilson Blvd., Suite 500, Arlington, VA 22201, http://www.ari.org.

⁴ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, http://www.ansi.org.

⁵ Available from U.S. Government Printing Office Superintendent of Documents, 732 N. Capitol St., NW, Mail Stop: SDE, Washington, DC 20401, http://www.access.gpo.gov.

3.1.2 *non-condensable gases*—non-condensable gases consist primarily of air (nitrogen, oxygen) accumulated in the vapor phase of a liquefied compressed gas where the solubility of air in the liquid phase is extremely low and air is not significant as a liquid phase contaminant. Non-condensable gases are in some instances termed non-absorbable gases.

4. Material Requirements

4.1 *Type I*—Mixtures of Halon 1211 and Nitrogen:

4.1.1 The nitrogen (N₂) partial pressure shall be such that the safe working pressure of the receiving vessel is not exceeded. To prevent excessive pressure, the fill density of Halon 1211 within a container should not exceed that needed to achieve complete filling of the container at the maximum envisaged storage temperature. For example, for a U.S. DOT 4W260 cylinder, the nitrogen partial pressure shall not exceed 129 psig at 70°F [9.9 bar at 21°C] for a 100 lb/ft³ [1602 kg/m³] fill density, which yields a total pressure of 150 psig at 70°F [11.4 bar at 21°C]. For this example, the safe working pressure of the 4BW260 cylinder is not exceeded for temperatures below 131°F [55°C]. (See Practice D7815.) (See Figs. 1 and 2.)

4.1.2 Halon 1211 shall conform to the requirements prescribed in Table 1 when tested by the appropriate test method(s) listed in Section 6.

4.1.3 When a material analysis is required, by agreement between the purchaser and the supplier, the total pressure in the Halon 1211 container, partial pressure of the N₂, the fill density of the Halon 1211 within the container, and the maximum safe storage temperature shall be part of the material analysis (certification). The pressure shall be reported in pound-force per square inch gauge (preferred) or bar. The fill density shall be reported in pounds per cubic foot at 70°F (preferred) or kilograms per cubic metre at 21°C. The maximum safe storage temperature of the Halon 1211 container shall be reported in degrees Fahrenheit (preferred) or in degrees Celsius and shall conform to applicable regulations for the Halon 1211 container design and use.

4.2 *Type II*—Halon 1211 shall conform to the requirements of Type I, as listed in 4.1, and shall contain no more than 1.5 % by volume non-condensable gases in the vapor phase, expressed as air when tested by the appropriate test method(s) listed in Section 6.

4.3 By agreement between the purchaser and the supplier, analysis may be required and limits established for elements or compounds not specified in Table 1.

4.4 Unless otherwise specified, Type I is assumed.

4.5 (**Warning**—Exposure to concentrations of Halon 1211 in excess of 1.0 % by volume in air during periods of elevated adrenaline could produce cardiac arrhythmia in some personnel.)

5. Sampling

5.1 Samples of Halon 1211 shall be taken from the liquid or vapor phase as appropriate. Samples of Halon 1211, taken from the liquid phase, shall be taken from filled containers in accordance with the method specified in ISO 3427 or the method specified in 2008 Appendix C for Analytical Procedures for AHRI Standard 700-2012, Part 7.

5.1.1 The sampling vessel shall be capable of safely resisting the vapor pressure of the sample at the highest temperature that could be encountered during handling, storage, or transport. (See Practice D7815.)

5.2 The Halon 1211 selected in accordance with 5.1 shall be tested for quality conformance in accordance with Section 6. The presence of one or more defects shall be cause for rejection.

6. Test Methods

6.1 *Purity:*

6.1.1 Determine the purity by gas chromatography in accordance with the technique described in 6.1.2 – 6.1.5 or by gas chromatography/mass spectrometry (GC/MS) in accordance with 6.2.2 – 6.2.5.

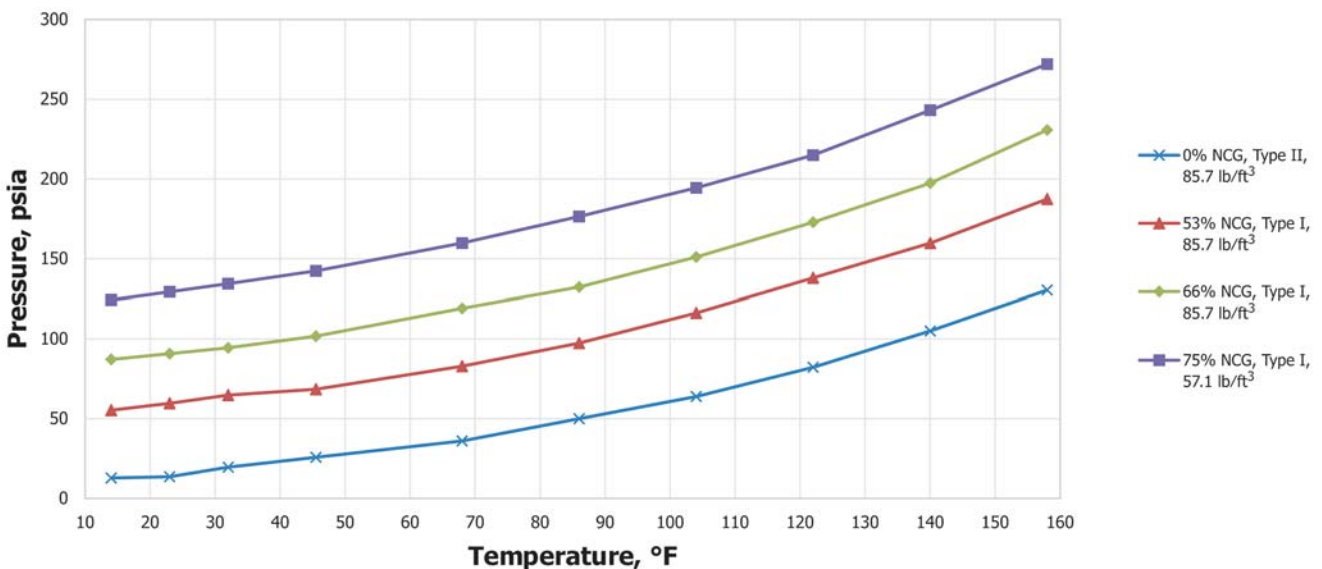


FIG. 1 Halon 1211 Pressure versus Temperature, English Units