



Designation: F2169 – 15 (Reapproved 2020)

## Standard Specification for Resilient Stair Treads<sup>1</sup>

This standard is issued under the fixed designation F2169; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

### 1. Scope

1.1 This specification covers resilient treads made of rubber and vinyl for interior use.

1.2 The values stated in inch-pound units are to be regarded as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

### 2. Referenced Documents

2.1 The following documents of the issue in effect on the date of the material purchase form a part of this specification to the extent referenced herein:

2.2 *ASTM Standards:*<sup>2</sup>

[D883 Terminology Relating to Plastics](#)

[D1566 Terminology Relating to Rubber](#)

[D1755 Specification for Poly\(Vinyl Chloride\) Resins](#)

[D2240 Test Method for Rubber Property—Durometer Hardness](#)

[F386 Test Method for Thickness of Resilient Flooring Materials Having Flat Surfaces](#)

[F925 Test Method for Resistance to Chemicals of Resilient Flooring](#)

<sup>1</sup> This specification is under the jurisdiction of ASTM Committee F06 on Resilient Floor Coverings and is the direct responsibility of Subcommittee F06.80 on Specifications.

Current edition approved May 1, 2020. Published June 2020. Originally approved in 2002. Last previous edition approved in 2015 as F2169-15<sup>ε1</sup>. DOI: 10.1520/F2169-15R20.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, [www.astm.org](http://www.astm.org), or contact ASTM Customer Service at [service@astm.org](mailto:service@astm.org). For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

[F1514 Test Method for Measuring Heat Stability of Resilient Flooring by Color Change](#)

2.3 *ANSI Standard:*

[ANSI/ASQC Z1.4-2003 Sampling Procedures and Tables for Inspection by Attributes](#)<sup>3</sup>

### 3. Terminology

3.1 *Material Definitions:*

3.1.1 *rubber, thermoplastic*—The polymeric binder of this compound shall satisfy the definition of rubber, but remain thermoplastic, as defined in Terminology [D883](#).

3.1.2 *rubber, vulcanized thermoset*—the polymeric binder of this compound shall satisfy the definition of rubber, and have been vulcanized, as defined in Terminology [D1566](#).

3.1.3 *vinyl, thermoplastic*—The polymeric binder of this compound shall satisfy the definition of poly (vinyl chloride) in Terminology [D883](#) and Specification [D1755](#) but remain thermoplastic as defined in Terminology [D883](#).

### 4. Classification

4.1 Treads covered by this specification will be of the following types (compositions), class, groups and grades as specified.

Type TS	Rubber, Vulcanized Thermoset
Type TP	Rubber, Thermoplastic
Type TV	Vinyl, Thermoplastic
Class 1	Smooth (Flat)
Class 2	Pattern: Embossed, Grooved, or Ribbed
Group 1	Abrasive Strips: Embedded
Group 2	Contrasting Color for Visually Impaired
Grade –	Based on Shore A durometer hardness: Grade 1 $\geq$ 85 Grade 2 $\geq$ 70 but less than 85

### 5. Ordering Information

5.1 Purchasers shall state whether this specification is to be used, select the preferred options permitted herein, and include the following information in the invitation to bid or purchase order:

5.1.1 Title, number, and date of this specification.

5.1.2 Type, class, nosing style (see Sections [4](#) and [6](#)).

5.1.3 Color (see [6.4](#)).

<sup>3</sup> Available from American National Standards Institute, 25 W. 43rd St., 4th Floor, New York, NY 10036.

- 5.1.4 Quantity, in pieces, linear feet, or cartons.
- 5.1.5 Thickness required (see 8.2).
- 5.1.6 Length required (see 8.3).
- 5.1.7 Lot information, if other than as specified in ANSI/ASQC Z1.4-2003 (see 10.1 and 11.1).
- 5.1.8 Sampling, if other than as specified in ANSI/ASQC Z1.4-2003 (see 10.1).
- 5.1.9 Statement requesting certification, if certification of compliance is required (see Section 12).
- 5.1.10 Packing requirement, if other than as specified (see Section 14).
- 5.1.11 Palletization, if required.
- 5.1.12 Marking required, if other than specified (see Section 13).
- 5.1.13 Other requirements.

**6. Materials and Manufacture**

6.1 *Standard Commercial Product*—A tread of the same classification shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer’s standard commercial product. A standard commercial product is a product that has been sold or is currently being offered for sale on the commercial market through advertisements, manufacturer’s catalogs, or brochures and represents the latest production model.

6.2 *Tread Design*—The upper surface of tread shall have one or a combination of the following:

Class 1	Smooth (Flat)
Class 2	Pattern: Embossed, Grooved, or Ribbed
Group 1	Abrasive Strips: Embedded
Group 2	Contrasting Color for Visually Impaired

6.2.1 *Class 1, Smooth (Flat)*—The tread surface shall be smooth and flat.

6.2.2 *Class 2, Pattern: Embossed, Grooved, or Ribbed*—When the surface is embossed, grooved or ribbed, the depth of the design shall not be greater than 50 % of the overall thickness of the tread.

6.2.3 *Group 1, Abrasive Strips (Embedded)*—When specified, one or more mineral-coated abrasive grit strips, each strip not less than 0.030-in. (0.76 mm) thick, shall be recessed into and adhered to the top surface of a smooth surface tread portion to form a continuous flat surface overall. Each strip shall run the full length of the treads and shall be parallel to the nose of the tread. The front edge of the first strip shall be not more than 1 in. (25.4 mm) from the nose of the step or landing. If a second strip is used, it shall be ¾ (19 mm) to 1½ in. (38 mm) from the first strip.

6.2.4 *Group 2, Contrasting Color for Visually Impaired*—The tread shall contain a strip of contrasting color of either the same material or an abrasive material.

6.3 *Nosing Style*—Nosing style shall be as specified (see Figs. 1-3 for some typical styles).




FIG. 1 Round Nose



FIG. 2 Square Nose

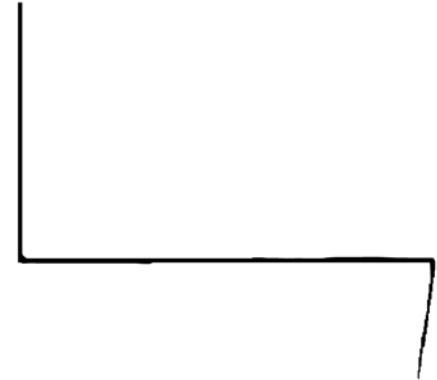


FIG. 3 With Riser

6.4 *Color*—According to manufacturer’s latest catalogs, and actual samples. Sample color may vary with age and storage conditions.

**7. Performance Requirements**

7.1 *Hardness*—The treads shall have a durometer hardness as follows:

Grade 1 ≥ 85

Grade 2 ≥ 70 but less than 85 (Shore, Type A, instantaneous reading) when tested in accordance with Test Method D2240.

7.2 *Molded Stair Treads*—The bonding surface of the tread shall be sanded, roughened, or otherwise modified by the manufacturer to remove substances that may interfere with proper adhesion.

7.3 *Tread Backs*—Unless otherwise specified in the contract or order, the back or bonding surface of the rubber tread shall be sanded, buffed, roughened, ribbed/grooved, or otherwise modified to ensure proper adhesion.

7.4 *Resistance to Chemicals, Short-Term Exposure*—When tested in accordance with Test Method F925, the vinyl and rubber treads shall have no more than a slight change in surface dulling, surface attack, or staining when exposed to the following chemicals:

- White Vinegar (5 % Acetic Acid)
- Rubbing Alcohol (70 % Isopropyl Alcohol)
- Sodium Hydroxide Solution (5 % NaOH)
- Hydrochloric Acid Solution (5 % HCl)
- Sulfuric Acid Solution (5 % H<sub>2</sub>SO<sub>4</sub>)
- Household Ammonia Solution (5 % NH<sub>4</sub>OH)
- Household Bleach Solution (5.25 % NaOCl)

NOTE 1—These basic chemicals are representative of those likely to be found in domestic, commercial, and institutional use. Many proprietary compounds contain one or more of these basic chemicals. Should the rubber or vinyl tread for an unusual application need to be resistant to a specific chemical, this additional requirement should become part of the procurement document.