

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. B
AS1073™

FEDERAL SUPPLY CLASS


RATIONALE

THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE G-3, AEROSPACE COUPLINGS, FITTINGS, HOSE, TUBING ASSEMBLIES COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAE values your input. To provide feedback on this Technical Report, please visit <http://standards.sae.org/AS1073B>



CUSTODIAN: G-3/G-3D

ISSUED 1968-06 REVISED 1989-08 REAFFIRMED 2013-01 STABILIZED 2019-01



AEROSPACE STANDARD
SLEEVE HOSE ASSEMBLY,
HEAT SHRINKABLE

AS1073™

REV. B

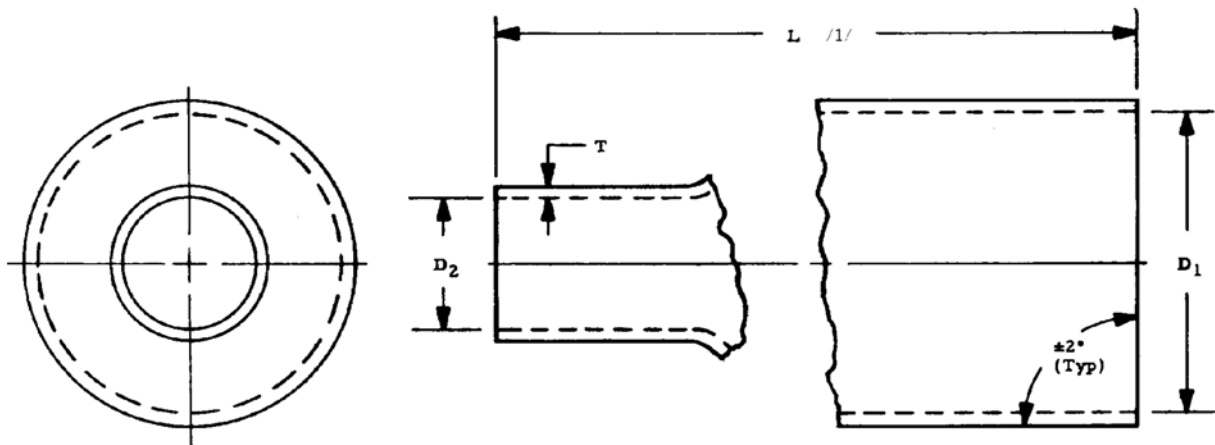


TABLE 1 - POLYOLEFIN

SIZE	*MATERIAL CODE		D ₁ EXPANDED ID Min (in)	D ₂ RECOVERED ID Min (in)	L /1/ At D ₁ DIA (in)	T At D ₁ DIA (in)	WEIGHT (lbs/in)				
	AMS 3637	AMS 3636									
-2	A	B	0.500	0.250	As Specified	0.025 ± 0.003	0.0006				
-3	↑	↑	0.675	0.375		↑	0.030 ± 0.005	0.0012			
-4	↑	↑	0.750								
-5	↑	↑	0.820	0.500			↓	0.035 ± 0.005	0.0018		
-6	↑	↑	1.00								
-7	↑	↑	1.18	0.750				↓	0.040 ± 0.006	0.0032	
-8	↑	↑	1.50								
-9	↑	↑	1.74	1.00					↓	0.045 ± 0.007	0.0049
-10	↑	↑	2.00								
-11	↑	↑	2.20	1.50						↓	0.050 ± 0.008
-12	↑	↑	3.00								
-13	A	B	4.00	2.00	As Specified	0.055 ± 0.009					0.0121