REV E

AS33514™

The use of this report is entirely

invites your written comments and suggestions SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user SAE or cancelled. stabilized, reaffirmed, reviews each technical report at least every five years at which time it may be revised, SAE

**RATIONALE** 

TYPO CORRECTED TO SURFACE FINISH IN FIGURE 2, DETAIL AA FOR THE 24° SLOPE.

WHEN STYLE G IS SPECIFIED, UNDERCUT MAY BE OMITTED. IN WHICH CASE, FULL THREADS SHALL EXTEND TO THIS POINT TWO INCOMPLETE THREADS (MAX) 45° ±5° 24° ØD ØY ØС 12° SEE DETAIL BB STYLE G SEE DETAIL AA


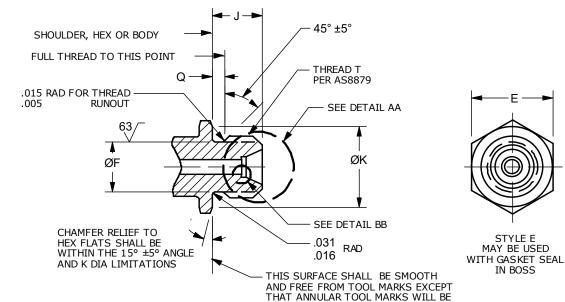


FIGURE 1 - STYLE E AND G

**INACTIVE FOR NEW DESIGN /4/** 

ALLOWED TO 100 MICROINCHES Ra

SAE values your input. To provide feedback on this Technical Report, please visit http://standards.sae.org/AS33514E



FEDERAL SUPPLY CLASS 4730

CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: NONE

## **AEROSPACE STANDARD**

FITTING END, STANDARD DIMENSIONS FOR FLARELESS TUBE CONNECTION AND **GASKET SEAL** 

AS33514™ SHEET 1 OF 3 REV. Ε

**REVISED 2019-04** 

REAFFIRMED 2015-04

1998-08