

FEDERAL SUPPLY CLASS  
4720

REV.  
C

AS4477™

RATIONALE

CORRECT NOTE /8/ WORDING.

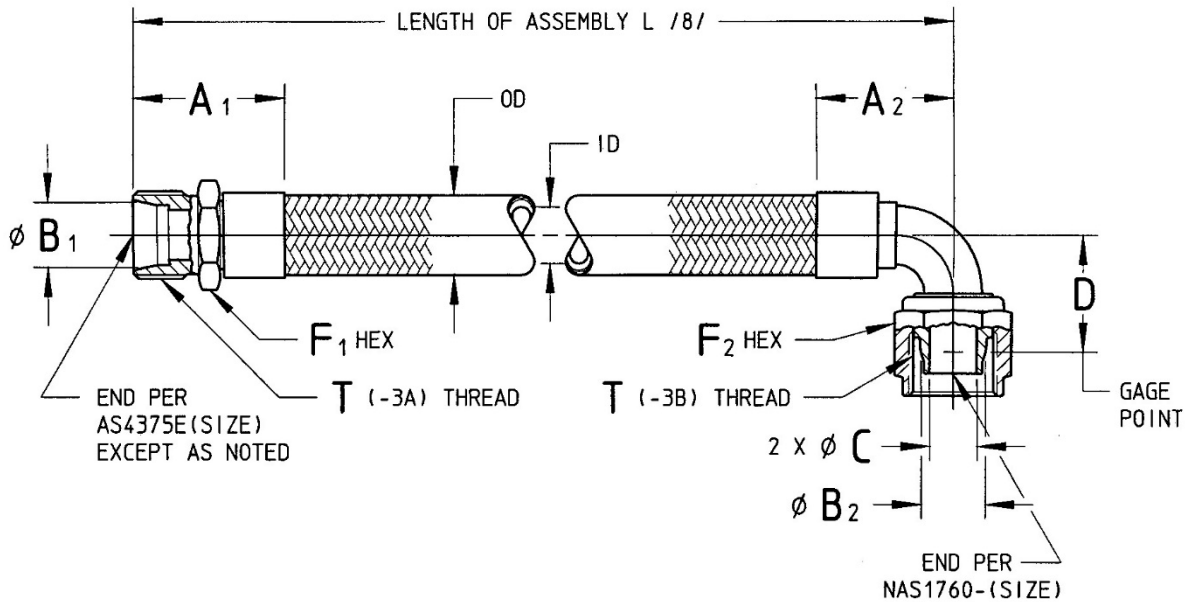



FIGURE 1 - HOSE ASSEMBLY

TABLE 1 - HOSE ASSEMBLY DIMENSIONS

BASIC NO. AND SIZE CODE	HOSE SIZE (REF)	F <sub>1</sub> HEX ACROSS FLATS (REF)	F <sub>2</sub> HEX ACROSS FLATS (REF)	ID (REF)	OD MIN	OD MAX
AS4477-04	.250	.50	.56	.250	.37	.48
AS4477-06	.375	.62	.69	.375	.53	.59
AS4477-08	.500	.81	.88	.500	.65	.73
AS4477-10	.625	.94	1.00	.625	.81	.85
AS4477-12	.750	1.12	1.25	.750	.94	.98
AS4477-16	1.000	1.36	1.50	1.000	1.19	1.23

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE invites your written comments and suggestions.

SAE values your input. To provide feedback on this Technical Report, please visit <http://standards.sae.org/AS4477C>



CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: AS4468 /2/



**AEROSPACE STANDARD**

HOSE ASSEMBLY, LINED SILICONE,  
125 PSI, FLARELESS, POTABLE WATER,  
STRAIGHT MALE TO 90° FEMALE

AS4477™  
SHEET 1 OF 3

REV.  
C

ISSUED 1992-05 REAFFIRMED 2007-01 REVISED 2018-08