

RATIONALE

AS4628D HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

REV.  
D

AS4628

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

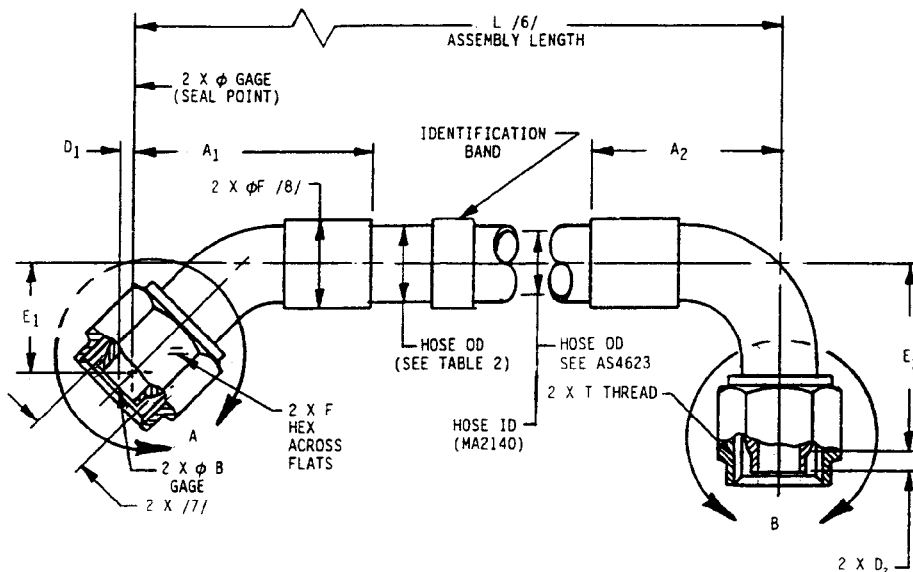


FIGURE 1 - HOSE ASSEMBLY, 45° ELBOW TO 90° ELBOW


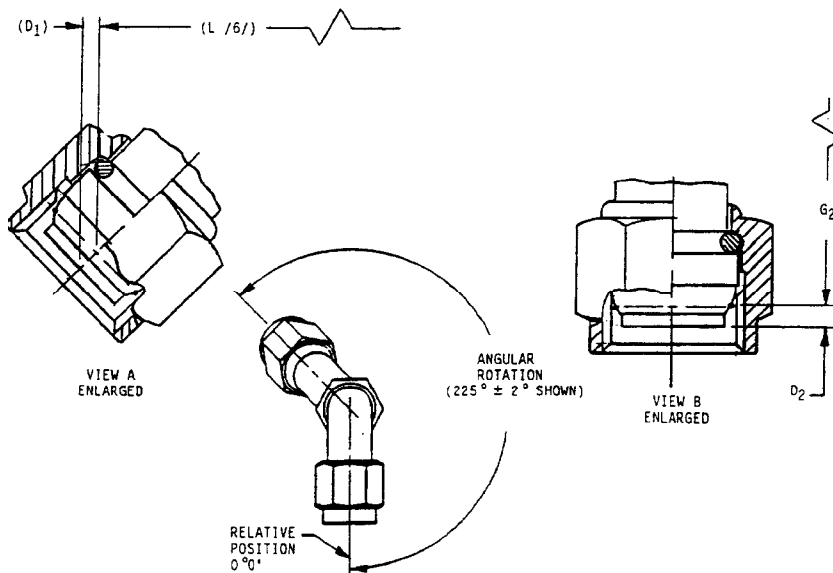


FIGURE 2 - FITTING ORIENTATION /19/

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS4628D>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: /2/ AS4623



**AEROSPACE STANDARD**

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE, PARA ARAMID REINFORCED, HEAVY-DUTY, 275 °F, 3000 PSI FLARELESS TITANIUM FITTINGS, INCLUDING JUMP SIZE, 45° TO 90°

**AS4628**  
SHEET 1 OF 5

**REV. D**



TABLE 1 – HOSE AND FITTING DIMENSIONS

BASIC HOSE ASSEMBLY NO. 4628 SIZE CODE	SIZE	/14/ FITTING TYPE	THREAD T PER AS8879	A <sub>1</sub> MAX	A <sub>2</sub> MAX	B GAGE BASIC	(C) HEX	D <sub>1</sub>	D <sub>2</sub>	E <sub>1</sub> MAX	E <sub>1</sub> MIN	E <sub>2</sub> MAX	E <sub>2</sub> MIN	F MAX	BALL SIZE MIN THRU /7/ IN
E	0.250	S	0.4375-20UNJF-3B	2.160	1.180	0.2930	0.56	0.11	0.16	0.475	0.350	0.770	0.645	0.69	0.102
G	0.375	S	0.5625-18UNJF-3B	2.460	2.180	0.4120	0.69	0.12	0.16	0.500	0.375	0.840	0.715	0.80	0.174
H	0.500	S	0.7500-16UNJF-3B	2.740	2.538	0.5600	0.88	0.13	0.19	0.560	0.435	0.940	0.845	0.97	0.267
J	0.625	S	0.8750-14UNJF-3B	3.785	3.375	0.6730	1.00	0.14	0.20	0.670	0.545	1.210	1.085	1.15	0.323
K	0.750	S	1.0625-12UNJ-3B	4.810	3.940	0.8100	1.25	0.16	0.23	0.705	0.580	1.400	1.275	1.38	0.433
M	1.000	S	1.3125-12UNJ-3B	5.540	4.510	1.0620	1.50	0.21	0.30	0.840	0.715	1.625	1.500	1.66	0.646
N	1.250	S	1.5625-12UNJ-3B	6.770	5.310	1.3160	1.81	0.03	0.04	0.875	0.750	1.825	1.700	2.32	0.786

TABLE 2 – HOSE OR SLEEVE OUTSIDE DIAMETERS /10/

SLEEVE CODE	SLEEVE MATERIAL	TEMP LIMIT °F	HOSE SIZE 0.250	HOSE SIZE 0.375	HOSE SIZE 0.500	HOSE SIZE 0.625	HOSE SIZE 0.750	HOSE SIZE 1.000	HOSE SIZE 1.250
-	(-) INDICATES HOSE ONLY NO SLEEVE (SEE AS4623)	275	--	--	--	--	--	--	--
A	FIRE SLEEVE (AS1072 SIL-FG) (5 MIN) /11/ /12/ /13/	275	0.930/0.730	1.070/0.880	1.205/1.015	1.370/1.130	1.590/1.380	1.847/1.677	2.130/1.950
B	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073-CODE B) /20/	275	0.620/0.540	0.770/0.690	0.917/0.833	1.042/0.948	1.314/1.206	1.623/1.511	1.896/1.784
K	INTEGRAL ABRASION SLEEVE (BRAIDED) POLYESTER /21/	275	0.555/0.635	0.675/0.755	0.840/0.920	0.935/1.025	1.205/1.305	1.502/1.602	1.775/1.875

**AEROSPACE STANDARD**

HOSE ASSEMBLY, POLYETRAFLUOROETHYLENE, PARA ARAMID REINFORCED, HEAVY-DUTY, 275 °F, 3000 PSI FLARELESS TITANIUM FITTINGS, INCLUDING JUMP SIZE, 45° TO 90°

AS4628 SHEET 2 OF 5

REV. D