

REV.  
B

AS9964™

RATIONALE

FIGURE 1 REDRAWN, RESTORE DATUM D (INADVERTANTLY DELETED ON LAST REVISION), CORRECT ERROR IN HEAD THICKNESS CALLOUT IN FIGURE 1 (PER ORIGINAL ISSUE), CORRECT ERROR IN L DIM FOR P/N MS9964-07, ADD TERTIARY DATUM TO FEATURE CONTROL FRAME FOR DRILLED HOLES, REVISE LEAD THREAD CHAMFER, CLARIFY NOTE 3 AND DELETE DUPLICATE REQUIREMENT REFERENCES, UPDATE MPI REFERENCE, ADD NEW NOTE FOR DISPOSITION OF EXISTING INVENTORY, UPDATE DRAWING FORMATS TO ANSI Y14.5M-1982, ADD AS3062 FOR THREAD RUNOUT, ADD EDGE DISTANCE EXCEPTION FOR MARKING, GENERAL EDITORIAL UPDATES.

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9964, NOTICE 1. THIS SAE STANDARD MAY RETAIN THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL'S) MAY CONTINUE TO BE MANDATORY FOR DoD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE invites your written comments and suggestions.


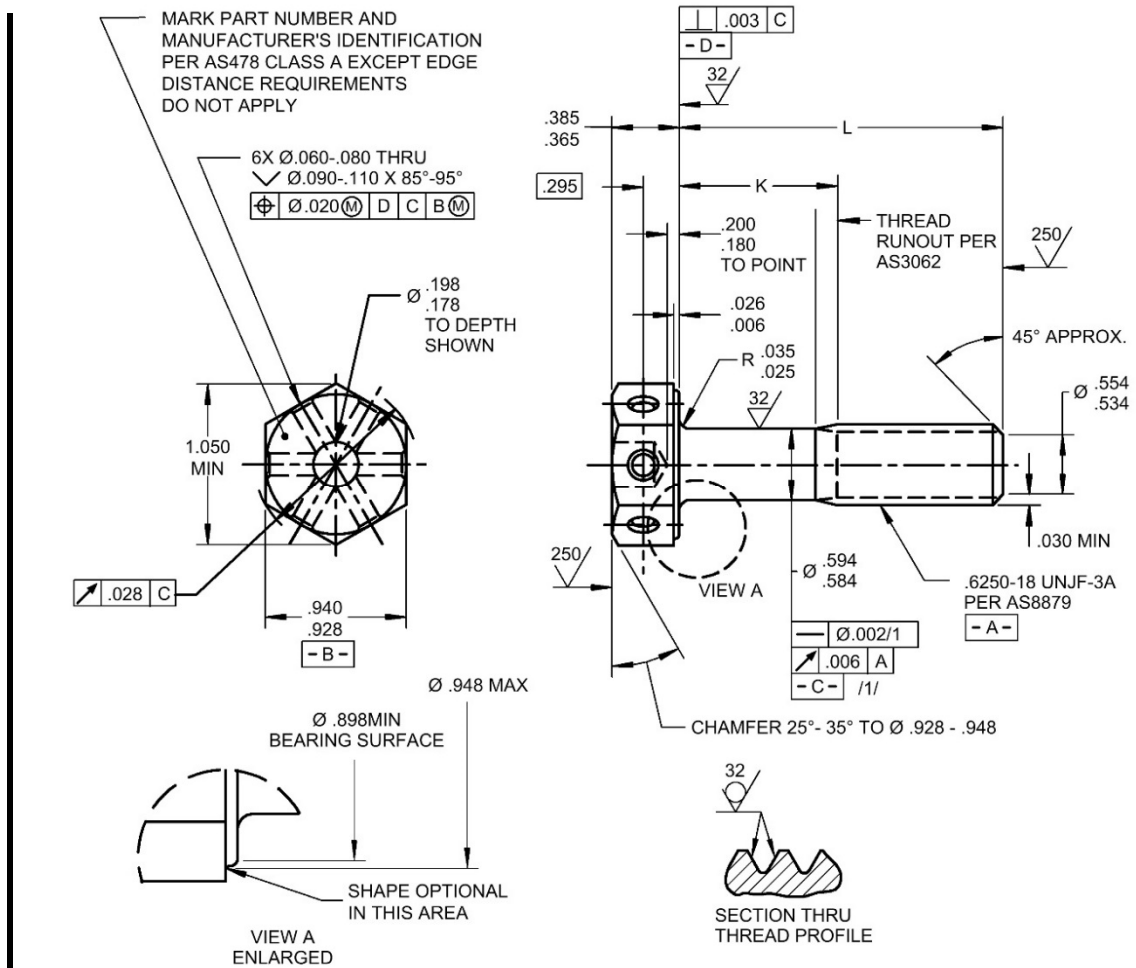


FIGURE 1 - BOLT

SAE values your input. To provide feedback on this Technical Report, please visit <http://standards.sae.org/AS9964B>



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7452 /3/



**AEROSPACE STANDARD**

BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PD SHANK, STEEL AMS6322 (UNS G87400), CADMIUM PLATED, .6250-18 UNJF-3A

AS9964™  
SHEET 1 OF 3

REV.  
B

ISSUED 1999-12 REAFFIRMED 2005-05 REVISED 2019-10