


中华人民共和国航空工业标准

100°沉头锥端螺栓

HB 7204-95

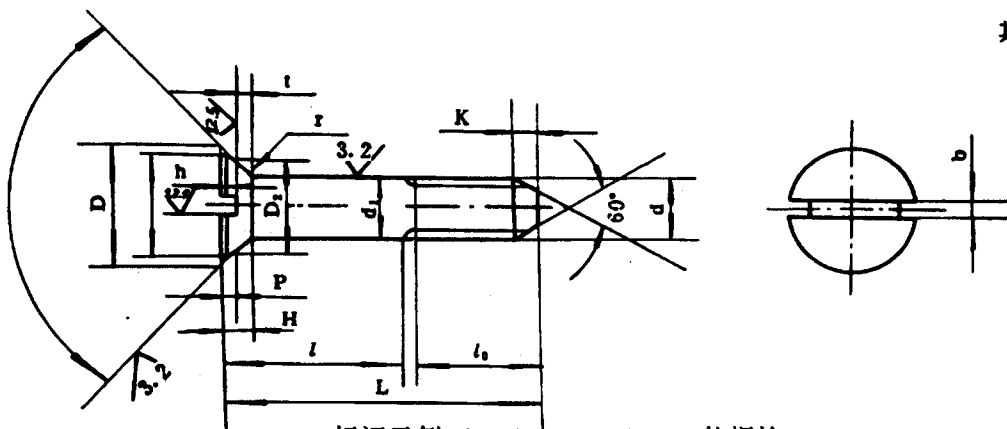

标记示例: $d_1 = 6\text{mm}$, $L = 36\text{mm}$ 的螺栓

HB 7204-6×36

表 2

mm

d_1 (h12)	4	5	6	8	10	
d	M4	M5	M6	M8	M10	
H(参考)	1.58	2.11	2.53	3.38	4.23	
hmin	0.08	0.10	0.10	0.10	0.10	
D(参考)	8	10	12	16	20	
D_1 min	7.2	9.0	10.8	14.8	18.8	
D_2 ¹⁾	5.78	7.71	9.00	12.21	15.43	
l_0 (参考)	9.5	12.5	14.0	15.5	19.0	
P	max	0.96	0.96	1.26	1.60	1.93
	min	0.85	0.88	1.18	1.52	1.85
r	max	0.4	0.5	0.7	0.7	0.8
	min	0.2	0.3	0.5	0.5	0.6
b(H12)	1.0	1.2	1.5	1.5	2.0	
t(h14)	1.2	1.2	1.5	2.0	2.5	
K(参考)	1.5	2.0	3.0	3.5	4.0	

注:1)供测量用。