


ETSI EN 300 220-3 V1.1.1 (2000-09)

Candidate Harmonized European Standard (Telecommunications series)

**Electromagnetic compatibility and
Radio spectrum Matters (ERM);
Short Range Devices (SRD);
Radio equipment to be used in the 25 MHz to 1 000 MHz
frequency range with power levels ranging up to 500 mW;
Part 3: Harmonized EN covering essential requirements
under article 3.2 of the R&TTE Directive**

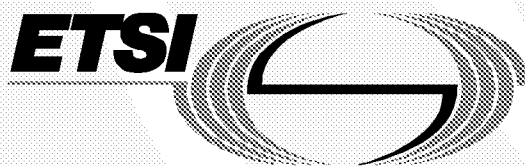

Reference

REN/ERM-RP08-0403-3

Keywords

radio, SRD, testing

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword.....	5
Introduction	6
1 Scope	8
2 References	8
3 Definitions, symbols and abbreviations	9
3.1 Definitions.....	9
3.2 Symbols.....	9
3.3 Abbreviations	9
4 Technical requirements specifications	9
4.1 Transmitter requirements	9
4.1.1 Frequency error or frequency drift.....	9
4.1.2 Carrier power (conducted)	9
4.1.3 Effective radiated power	9
4.1.4 Frequency deviation.....	9
4.1.5 Modulation depth.....	10
4.1.6 Adjacent channel power.....	10
4.1.7 Range of modulation bandwidth for wide band equipment (> 25 kHz).....	10
4.1.8 Spurious emissions	10
4.1.9 Frequency stability under low-voltage conditions	10
4.1.10 Duty cycle	10
4.2 Receiver requirements	10
4.2.1 Spurious radiations	10
4.2.2 Adjacent channel selectivity - in band	10
4.2.3 Adjacent band selectivity.....	11
4.2.4 Blocking or desensitization.....	11
5 Testing for compliance with technical requirements.....	11
5.1 Essential radio test suites.....	11
5.1.1 Environmental conditions for testing	11
5.1.1.1 Normal and extreme test-conditions.....	11
5.1.1.2 Test power source	11
5.1.2 Choice of samples for test suites.....	11
5.1.3 Transmitter test suites	11
5.1.3.1 Frequency error or drift.....	11
5.1.3.2 Carrier power (conducted)	11
5.1.3.3 Effective radiated power	12
5.1.3.4 Frequency deviation	12
5.1.3.5 Modulation depth	12
5.1.3.6 Adjacent channel power.....	12
5.1.3.7 Range of modulation bandwidth for wide band equipment (> 25 kHz).....	12
5.1.3.8 Spurious emissions.....	12
5.1.3.9 Frequency stability under low-voltage conditions	12
5.1.4 Receiver test suites.....	12
5.1.4.1 Spurious radiations.....	12
5.2 Other test specifications	13