

REV.
A

SAE AS5961

FEDERAL SUPPLY CLASS
4720

RATIONALE

REVISED PROCUREMENT NOTE /2/, COUPLING NUT NOTE /9/ AND ADDED NOTE /21/ TO CONFORM TO CURRENT REQUIREMENTS.

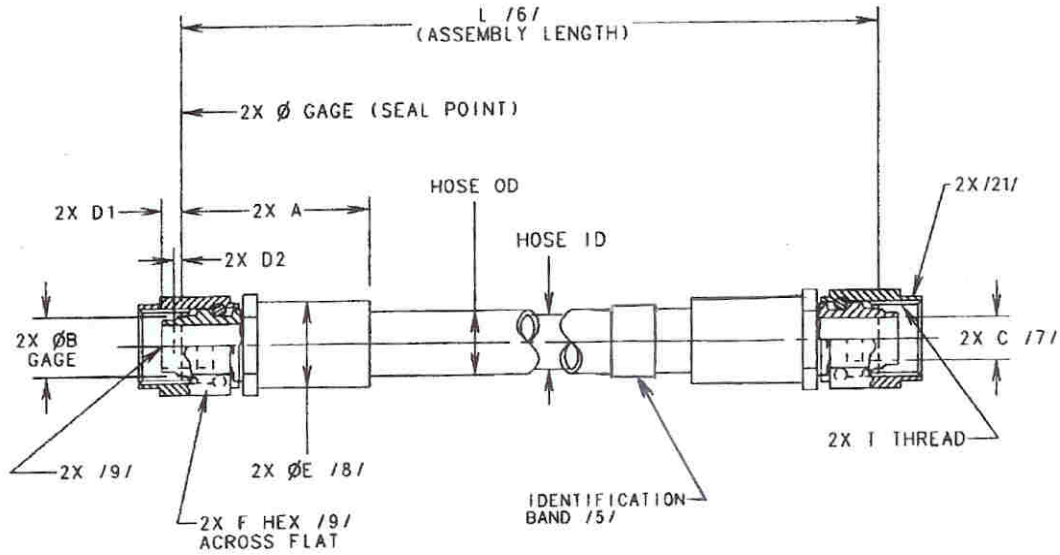


FIGURE 1 - HOSE ASSEMBLY DIMENSIONS


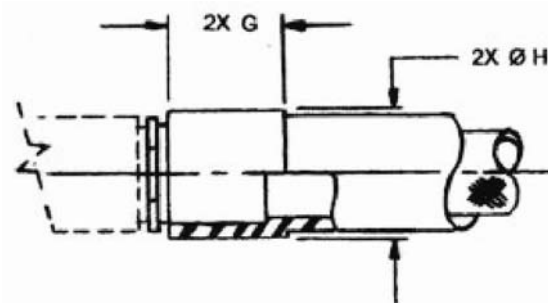


FIGURE 2 - INTEGRAL FIRESLEEVE CUFF /13/

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS5961A>

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: AS5960 /2/

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE
CRES BRAID REINFORCED, 400 °F, 5080 PSI
FLARELESS, STRAIGHT TO STRAIGHT

SAE AS5961
SHEET 1 OF 5

REV.
A

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TABLE 1 - HOSE ASSEMBLY DIMENSIONS

HOSE ASSEMBLY AS5961 SIZE CODE	SIZE	FITTING TYPE /17/	THREAD T PER AS8879	A MAX	ØB GAGE BASIC	C HEX	(D1) /9/	(D2) /9/	ØE /8/ MAX	BALL SIZE MIN THRU IN /7/
E	.250	--	--	--	--	--	--	--	--	--
E	.250	S	.4375-28UNJEF-3B	2.64	.2930	.56	.16	.055	.88	.120
E	.250	E	.5625-24UNJEF-3B	2.74	.4120	.69	.16	.055	.88	.120
G	.375	R	.4375-28UNJEF-3B	2.90	.2930	.56	.16	.055	1.00	.120
G	.375	S	.5625-24UNJEF-3B	2.94	.4120	.69	.16	.055	1.00	.203
G	.375	E	.7500-20UNJEF-3B	3.07	.5600	.88	.19	.066	1.00	.203
H	.500	R	.5625-24UNJEF-3B	3.19	.4120	.69	.16	.055	1.20	.203
H	.500	S	.7500-20UNJEF-3B	3.32	.5600	.88	.19	.066	1.20	.297
H	.500	E	.8750-20UNJEF-3B	3.39	.6730	1.00	.20	.066	1.20	.297
J	.625	R	.7500-20UNJEF-3B	3.55	.5600	.88	.19	.066	1.41	.297
J	.625	S	.8750-20UNJEF-3B	3.62	.6730	1.00	.20	.066	1.41	.369
J	.625	E	1.0625-18UNJEF-3B	3.87	.8100	1.25	.23	.066	1.41	.369
K	.750	R	.8750-20UNJEF-3B	3.89	.6730	1.00	.20	.066	1.69	.369
K	.750	S	1.0625-18UNJEF-3B	3.95	.8100	1.25	.23	.066	1.69	.459
K	.750	E	1.3125-16UNJ-3B	4.06	1.0620	1.50	.30	.066	1.69	.459
M	1.000	R	1.0625-18UNJEF-3B	4.42	.8100	1.25	.23	.066	2.00	.459
M	1.000	S	1.3125-16UNJ-3B	4.54	1.0620	1.50	.30	.066	2.00	.675
M	1.000	E	1.6250-16UNJ-3B	4.64	1.3160	1.81	.30	.066	2.00	.675
N	1.250	--	--	--	--	--	--	--	--	--
N	1.250	S	1.6250-16UNJ-3B	4.72	1.3160	1.81	.30	--	2.25	.833
N	1.250	--	--	--	--	--	--	--	--	--

TABLE 2 - HOSE AND SLEEVE OUTSIDE DIAMETER /10/

SLEEVE CODE	SLEEVE MATERIAL	TEMP LIMIT °F	TOLERANCE	SIZE .250	SIZE .375	SIZE .500	SIZE .625	SIZE .750	SIZE 1.000	SIZE 1.250
-	(-) INDICATES HOSE ONLY NO SLEEVE (SEE AS5960) REF	400 °F	MAX MIN	.510 .450	.620 .560	.760 .700	.960 .835	1.120 .995	1.430 1.305	1.685 1.560
C	FIRE SLEEVE (AS1072 SIL-FG) (15 MIN) /11/ /12/ /14/	400 °F	MAX MIN	.970 .810	1.090 1.000	1.220 1.060	1.500 1.260	1.590 1.470	1.950 1.780	2.190 1.940
F	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073-CODE B) /16/	275 °F	MAX MIN	.560 .480	.700 .590	.910 .760	1.045 .895	1.205 1.080	1.530 1.370	1.785 1.660
H	FIRE SLEEVE, INTEGRAL SILICONE (15 MIN) /14/	400 °F	MAX MIN	.815 .755	.940 .880	1.060 1.000	1.200 1.075	1.420 1.295	1.740 1.615	2.000 1.875
K	INTEGRAL ABRASION SLEEVE (BRAIDED POLYESTER) /15/	300 °F	MAX MIN	.590 .530	.710 .650	.860 .735	1.065 .885	1.205 1.130	1.530 1.405	1.815 1.690

TABLE 3 - HOSE ASSEMBLY LENGTH TOLERANCE

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 in	±.125 in
18 TO 36 in EXCLUSIVE	±.250 in
36 TO 50 in EXCLUSIVE	±.500 in
50 in AND OVER	±1%

 An SAE International Group	AEROSPACE STANDARD HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE CRES BRAID REINFORCED, 400 °F, 5080 PSI FLARELESS, STRAIGHT TO STRAIGHT	SAE AS5961 SHEET 2 OF 5	REV. A
---	---	-----------------------------------	---------------