REV.

AS5103

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions. SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

RATIONALE

TO CORRECT MAX WEIGHT AND UPDATE STANDARD.

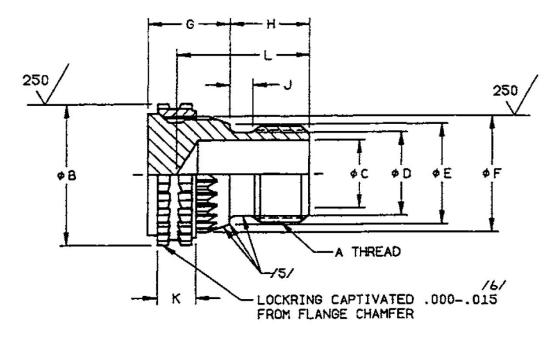


FIGURE 1 - PLUG. ASSEMBLY

## **TABLE 1A - DIMENSIONS**

BASIC NO.						
AS5103	Α					
/15/	THREAD			D	E	
SIZE CODE	AS8879	В	С	+.005/002	MIN	(F)
02	.2160-28UNJF-3A	.400	.071096	.154	.246	.317
03	.2500-28UNJF-3A	.468	.103128	.186	.278	.394
04	.3125-24UNJF-3A	.514	.165175	.239	.331	.400
05	.3750-24UNJF-3A	.624	.212237	.301	.393	.491
06	.4375-20UNJF-3A	.700	.275300	.364	.456	.544
08	.5625-18UNJF-3A	.814	.392408	.482	.574	.670
10	.6875-24UNJEF-3A	1.040	.478503	.625	.717	.824
12	.8125-20UNJEF-3A	1.170	.604614	.737	.891	.981
14	.9375-20UNJEF-3A	1.341	.714739	.868	1.022	1.118
16	1.1250-18UNJEF-3A	1.456	.841851	1.000	1.154	1.251
20	1.3125-18UNJEF-3A	1.782	1.037-1.062	1.225	1.379	1.466
24	1.6250-18UNJEF-3A	2.031	1.277-1.302	1.502	1.656	1.768
32	2.1250-16UNJ-3A	2.548	1.746-1.771	2.040	2.194	2.311

SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/AS5103A

THIRD ANGLE PROJECTION

CUSTODIAN: G-3/G-3B

**AEROSPACE STANDARD** 

(R) FITTING ASSEMBLY, PLUG, RING LOCKED PORT CONNECTION, 4000 PSI AND 5000 PSI /8/

AS5103 SHEET 1 OF 3

PROCUREMENT SPECIFICATION: /4/ AS85720

REV. Α

**REVISED 2014-05** 

REAFFIRMED 2007-11

1996-11

SSUED

Copyright 2014 SAE International