



Designation: C885 – 87 (Reapproved 2020)

# Standard Test Method for Young's Modulus of Refractory Shapes by Sonic Resonance<sup>1</sup>

This standard is issued under the fixed designation C885; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

## 1. Scope

1.1 This test method covers a procedure for measuring the resonance frequency in the flexural (transverse) mode of vibration of rectangular refractory brick or rectangularly shaped monoliths at room temperature. Young's modulus is calculated from the resonance frequency of the shape, its mass (weight), and dimensions.

1.2 *Units*—The values stated in inch-pound units are to be regarded as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

1.2.1 Although the Hertz (Hz) is an SI unit, it is derived from seconds which is also an inch-pound unit.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

## 2. Referenced Documents

2.1 *ASTM Standards:*<sup>2</sup>

**C134** Test Methods for Size, Dimensional Measurements, and Bulk Density of Refractory Brick and Insulating Firebrick

**C215** Test Method for Fundamental Transverse, Longitudinal, and Torsional Resonant Frequencies of Concrete Specimens

**C623** Test Method for Young's Modulus, Shear Modulus, and Poisson's Ratio for Glass and Glass-Ceramics by Resonance

**C747** Test Method for Moduli of Elasticity and Fundamental Frequencies of Carbon and Graphite Materials by Sonic Resonance

**C848** Test Method for Young's Modulus, Shear Modulus, and Poisson's Ratio For Ceramic Whitewares by Resonance

## 3. Summary of Test Method

3.1 Test specimens are vibrated in flexure over a broad frequency range; mechanical excitation is provided through the use of a vibrating driver that transforms an initial electrical signal into a mechanical vibration. A detector senses the resulting mechanical vibrations of the specimen and transforms them into an electrical signal that can be displayed on the screen of an oscilloscope to detect resonance by a Lissajous figure. The calculation of Young's modulus from the resonance frequency measured is simplified by assuming that Poisson's ratio is  $\frac{1}{6}$  for all refractory materials.

## 4. Significance and Use

4.1 Young's modulus is a fundamental mechanical property of a material.

4.2 This test method is used to determine the dynamic modulus of elasticity of rectangular shapes. Since the test is nondestructive, specimens may be used for other tests as desired.

4.3 This test method is useful for research and development, engineering application and design, manufacturing process control, and for developing purchasing specifications.

4.4 The fundamental assumption inherent in this test method is that a Poisson's ratio of  $\frac{1}{6}$  is typical for heterogeneous refractory materials. The actual Poisson's ratio may differ.

## 5. Apparatus

5.1 A block diagram of a suggested test apparatus arrangement is shown in Fig. 1. Details of the equipment are as follows:

<sup>1</sup> This test method is under the jurisdiction of ASTM Committee C08 on Refractories and is the direct responsibility of Subcommittee C08.01 on Strength.

Current edition approved Sept. 1, 2020. Published September 2020. Originally approved in 1978. Last previous edition approved in 2012 as C885 – 87 (2012). DOI: 10.1520/C0885-87R20.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

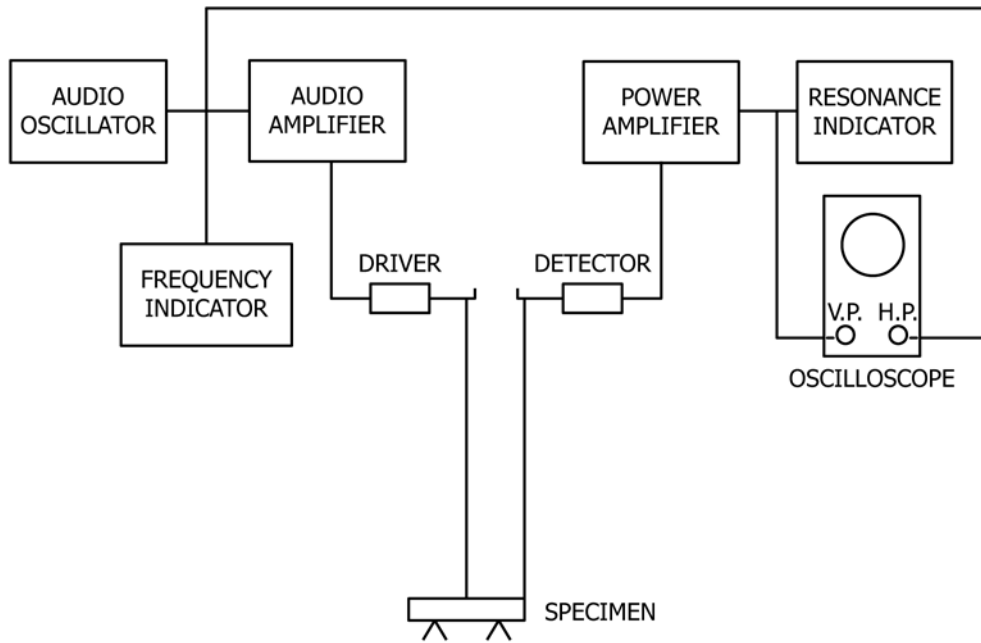


FIG. 1 Block Diagram of Apparatus

5.1.1 *Audio Oscillator*, having a continuously variable, calibrated frequency output from about 50 Hz to at least 10 kHz.

5.1.2 *Audio Amplifier*, having a power output sufficient to ensure that the type of driver used can excite the specimen; the output of the amplifier must be adjustable.

5.1.3 *Driver*, which may consist of a transducer or a loudspeaker from which the cone has been removed and replaced with a probe (connecting rod) oriented parallel to the direction of the vibration; suitable vibration-isolating mounts.

NOTE 1—For small specimens, an air column may preferably be used for “coupling” the loudspeaker to the specimen.

5.1.4 *Detector*, which may be a transducer or a balance-mounted monaural (crystal or magnetic) phonograph pick-up cartridge of good frequency response; the detector should be movable across the specimen; suitable vibration-isolating mounts.

5.1.5 *Pre-Scope Amplifier* in the detector circuit, impedance-matched with the detector used; the output must be adjustable.

5.1.6 *Indicating Devices*, including an oscilloscope, a resonance indicator (voltmeter or ammeter), and a frequency indicator, which may be the control dial of the audio-oscillator (accurately readable to  $\pm 30$  Hz or better) or, preferably, a frequency meter, for example, a digital frequency counter.

5.1.7 *Specimen Support*, consisting of two knife edges (can be steel, rubber-coated steel, or medium-hard rubber) of a length at least equal to the width of the specimens; the distance between the knife edges must be adjustable.

NOTE 2—The support for the knife edges may be a foam rubber pad, and should be vibration-isolated from drive and detector supports.

NOTE 3—Alternatively, knife edges can be omitted and the specimen may be placed directly on a foam rubber pad if the test material is easily excitable due to its composition and geometry.

## 6. Sampling and Specimen Preparation

6.1 Specimens must be rectangular prisms. They may be full straight brick or rectangular samples cut from brick shapes, rectangular straight shapes of monolithic refractories, or rectangular specimens cut from monolithic shapes. For best results, their length to thickness ratio should be at least 3 to 1. Maximum specimen size and mass are primarily determined by the test system’s energy capability and by the resonance response characteristics of the material. Minimum specimen size and mass are primarily determined by adequate and optimum coupling of the driver and the detector to the specimen, and by the resonance response characteristics of the material. Measure the mass (weight) and dimensions of the dry specimens in accordance with Test Methods C134 and record.

## 7. Procedure

7.1 Refractories can vary markedly in their response to the driver’s frequency; the geometry of the specimens also plays a significant role in their response characteristics. Variations in the following procedure are permissible as long as flexural and fundamental resonance are verified (Notes 6 and 7). Fig. 2 and

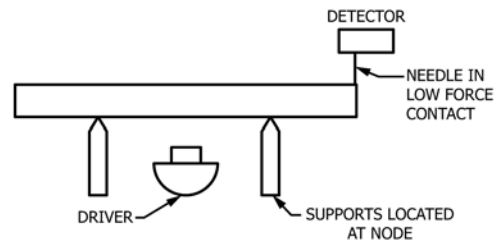


FIG. 2 Typical Specimen Positioning for Measurement of Flexural Resonance